



HD 6/15 G Classic

Easy to service and mobile: the HD 6/15 G. With combustion engine, intelligent accessories concept and robust crankshaft pump. Ideal for construction and agriculture. Water volume: 600 l/h.



1 High level of autonomy

- Can be used independently of a power supply thanks to powerful gasoline engines.
- Using optional accessories, the machines can draw in water, for example from ponds and lakes.

2 Accessories concept

- Practical intake for hose and high-pressure lance directly on the machine.
- Storage compartment for nozzles, tools and other small parts.

3 Outstanding mobility

- Ergonomic push handle for easier transport.
- Large wheels with pneumatic tyres for uneven surfaces.

4 Easy to service and durable

- Robust crankshaft pump with proven Kärcher quality.
- Large water filter protects pump against damage.



HD 6/15 G Classic

- Tubular steel frame
- Robust crankshaft pump

Technical data

| | | |
|-------------------------------|-------------------|------------------|
| Order no. | 1.187-003.0 | |
| EAN code | 4054278024646 | |
| Working pressure | bar / MPa | 150 / 15 |
| Max. pressure | bar | 200 |
| Flow rate | l/h | 600 |
| Max. inlet temperature | °C | 60 |
| Motor type | G200FA / gasoline | |
| Motor rating | kW / hp | 4.1 / 5.6 |
| Weight | kg | 41.9 |
| Dimensions (L × W × H) | mm | 799 × 637 × 1097 |

Equipment

| | | |
|---|------------------------|----|
| Spray gun | Easy Press trigger gun | |
| High-pressure hose | m | 10 |
| Power nozzle | ■ | |
| Anti-twist system (AVS) | - | |
| Electro start | - | |
| Quick Connect Kärcher standard nozzles | - | |
| Servo Control | - | |
| Vario Power spray lance | - | |
| Motor | Petrol | |

■ Included in the scope of supply.

HD 6/15 G CLASSIC

1.187-003.0




| | | Order no. | Max. working pressure | Nozzle size | | | Price | Description | |
|-----------------------|---|-------------|-----------------------|-------------|--|--|-------|--|--------------------------|
| Triple nozzles | | | | | | | | | |
| Triple nozzle 040 | 1 | 4.767-150.0 | 300 bar | 40 | | | | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5. | <input type="checkbox"/> |

Available accessories.

HD 6/15 G CLASSIC

1.187-003.0




| | | Order no. | Flow rate | | | | Price | Description | |
|--|---|-------------|-------------|--|--|--|-------|---|--------------------------|
| Inno Foam Kit | | | | | | | | | |
| Inno Foam Set with detergent injector | 1 | 2.640-151.0 | | | | | | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. | <input type="checkbox"/> |
| Nozzle kits for Inno/Easy Foam Set | | | | | | | | | |
| Nozzle kit 055 for Inno / Easy Set 500-600 l/h | 2 | 2.640-870.0 | 500-600 l/h | | | | | Optimal adaptation to different machine outputs for economic use. | <input type="checkbox"/> |
| Nozzle kit 060 for Inno / Easy Set 600-700 l/h | 3 | 2.640-687.0 | 600-700 l/h | | | | | | <input type="checkbox"/> |
| Foam nozzle mounting kit | | | | | | | | | |
| Foam nozzle attachment kit | 4 | 2.637-926.0 | | | | | | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary. | <input type="checkbox"/> |

Available accessories.

HD 6/15 G CLASSIC

1.187-003.0

KÄRCHER

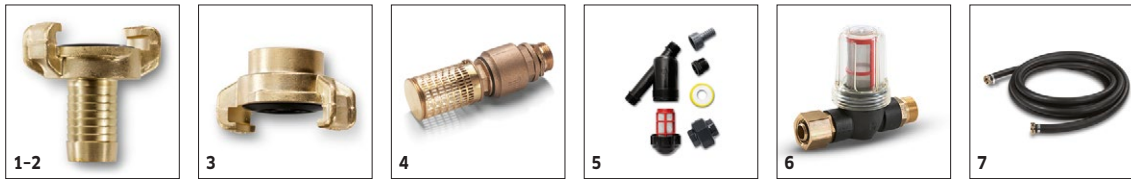

| | | Order no. | | | Price | Description | |
|---|---|-------------|--|--|-------|--|--------------------------|
| Geka coupling | | | | | | | |
| Geka connector with hose barb, R 1/2" | 1 | 6.388-461.0 | | | | with hose liner | <input type="checkbox"/> |
| Geka connector with hose barb, R 3/4" | 2 | 6.388-455.0 | | | | with hose liner | <input type="checkbox"/> |
| Geka connector with internal thread, R 1" | 3 | 6.388-458.0 | | | | with female thread | <input type="checkbox"/> |
| Suction filter | | | | | | | |
| Suction filter with check valve | 4 | 4.730-012.0 | | | | Brass suction filter suitable for ponds, storage tanks, etc. With check valve. | <input type="checkbox"/> |
| Water fine filter | | | | | | | |
| Water fine filter, with adapter | 5 | 4.730-102.0 | | | | Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the | <input type="checkbox"/> |
| Water fine filter, 100 µm, R 1" | 6 | 2.638-270.0 | | | | Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to | <input type="checkbox"/> |
| Water supply hose | | | | | | | |
| Water supply hose | 7 | 4.440-270.0 | | | | NW 19 R1" / R1", up to 85 °C | <input type="checkbox"/> |

Available accessories.