



King®

Airless Sprayers for
Protective Coating Applications



PROVEN QUALITY. LEADING TECHNOLOGY.

Graco airless sprayers have been the industry's preferred brand for over 60 years. When looking for a reliable, durable and rugged single-component protective coating pump to get the job done – Graco has you covered.





REGISTER YOUR KING UNIT AND GET A 2-YEAR WARRANTY!

Find the warranty tag on your brand new King unit and go to www.graco.com/kingrules

Simply follow the steps of the procedure and receive confirmation of your 2-year warranty.

TRUST THE BRAND THAT NEVER LETS YOU DOWN

The King fully loaded and ready
to tackle your toughest job.

Exposed Thermally Isolated Poppets

- Accessible for service

Accessory Box

- Conveniently mounted on cart
- Store your day-to-day essential tools and parts

Protective Rod Guard

- Prevent any potential pinch-point injuries while pump is in motion
- Keeps debris out of throat wet cup

Xtreme® Lowers - (MaxLife™ shown)

- Easy to maintain with quick knockdown
- New packings for better sealing
- Available in longer lasting MaxLife™

Improved Siphon Hose

- Shorter length for easy clean up
- Save flush material
- Less material waste





De-icing Valve

- Reduces main valve icing

Trusted XL Motor

- Sharp, smooth changeovers
- Low pulsation, even with multiple guns
- Removable cover for valve maintenance

Robust Air Controls

- High capacity filter regulator
- Lubricator option for extreme operating conditions

Cart with Wheels

- For portability and easy maneuverability
- Flat-free tyres

Sprayers require simple maintenance – we've made it easy.

A factory installed toolbox contains common items that every applicator should have on the job site. Contents include throat seal liquid, air filter element, tool for poppet and air valve, pump filter cap O-rings, pump filter element, spare tip and gun filter.

The box also includes storage space for your Graco XTR™ Spray Gun.

SIMPLE MAINTENANCE

*with removable valve cover and
easy access to poppet valves.*





Thermally isolated poppets* are insulated from motor castings that can often drop below freezing temperatures. The newly designed poppets and external pilot lines virtually eliminate pilot valve freezing that can result in an instant stop. The components are easily accessed for service or replacement if needed.

**Thermally isolated poppets used on XL 3400 and XL 6500 motors only.*

REDUCED ICING POTENTIAL

by **up to 70%** with thermally isolated poppets.



“We like the King pump,
we can’t break it, it will not freeze!”

- Hunnicut’s Incorporated



With 145% higher intake/exhaust capacity in the air valve compared to NXT™ motors you'll achieve a faster, smoother changeover. The faster the air gets out, the faster the pressure comes back. Eliminating the “wink” in your pattern – it is a difference you will feel.



LESS PULSATION

due to **smoother changeover** and no pressure drops,
resulting in a better finish!



“The King sprayer feels stronger than any pump I’ve ever used...”

- Tom Rathousky, Morin Industrial Coatings

Packings play a critical role in optimising spray performance by sealing pressure and holding material inside the pump. The tighter the seal, the better the performance.

- Graco UHMWPE is RED
- Reinforced PTFE is WHITE
- Packing glands are BLACK



“Whatever you did works... I haven’t experienced throat leakage with these new packings and I’ve been using pumps for 42 years.”

- Dave McAnany, sub-contractor for Worldwide Industries



IMPROVED SEALING AND STRENGTH

with enhanced edge loading and
seven throat packings instead of five.

MaxLife™ pumps are designed for the most demanding jobs, providing unmatched durability and life.

- Exclusive MaxLife™ sleeve rod
- Lasts up to 6-times longer
- Long-life ceramic balls for maximum versatility no matter what you're spraying (optional kit)
- Standard 2-line outlet



Built-in Filter

- Easy to maintain or remove

Zero Cavity Carbide Prime/Bleed Valve

- Less maintenance and no material build-up

Zero Cavity 2nd Gun Outlet


- Allowing no material build-up when not in use

Quick Knockdown Intake Valve and Cylinder

- Easy to service with minimal tools

Cartridge-style Throat Packings

- Quickly remove and replace for service

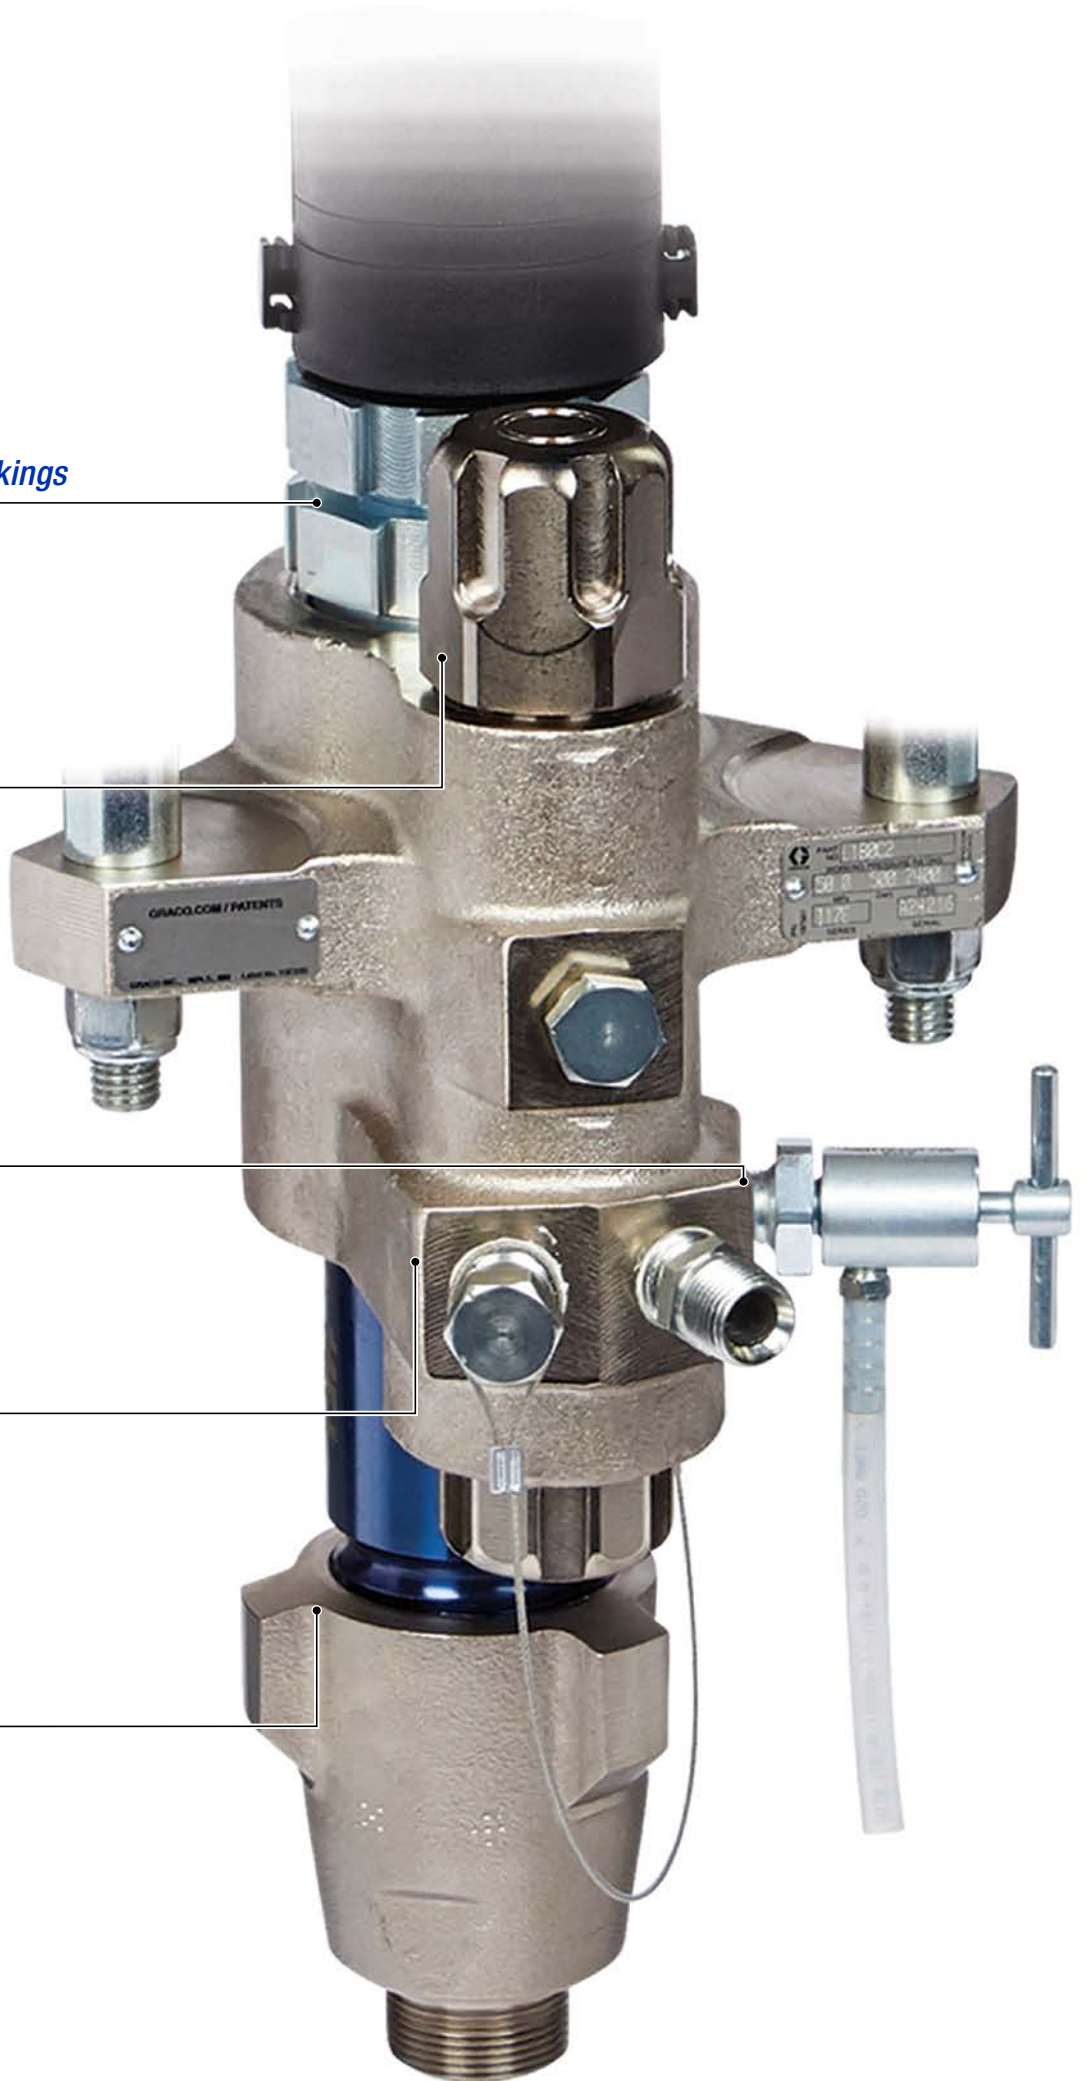

Graco's powerful new air motor lets you use multiple guns with almost no perceivable pulsation. A new manifold has been designed to simplify the installation of multiple guns.

MULTI-GUN CAPABILITIES

With more powerful and efficient changeovers,
the ability to spray with up to six guns* is now a reality.

** Depending on material, hose and tip size.*

“We spray with two guns most days. The King pump has so much power, it has no problem keeping up.”

- Cory Coles, Darran Green Sandblasting




Ordering Information

Graco King airless sprayers are built with your needs in mind. Depending on your job requirements – Graco has you covered.

Use the matrix below to create your part number.

Not all combinations are available, contact your Graco Distributor for part number availability.

K x x x x x

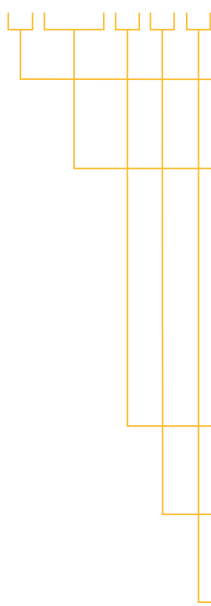

SPRAYER MODEL

K = King Sprayer

PACKAGE PRESSURE RATIO (Motor/Lower)

30: XL3400 motor/220cc lower

40: XL3400 motor/180cc lower

45: XL6500 motor/290cc lower

50: XL6500 motor/250cc lower

60: XL6500 motor/220cc lower

70: XL6500 motor/180cc lower

90: XL6500 motor/145cc lower

47: XL10000 motor/430cc lower DF*

71: XL10000 motor/290cc lower

82: XL10000 motor/250cc lower

*Not available in MaxLife™

LOWER TYPE

F: Integrated Filter

N: Non-Filter

M: MaxLife with Filter

MOUNT TYPE

H: Heavy Duty Cart

W: Wall Mount

OPTIONS

0: Bare package with air controls and siphon kit, no hose and gun

1: Standard complete package with air kit, siphon kit and hose/gun kit*

2: Standard complete package with air kit, siphon kit and hose/gun kit* and lubricator

*Hose/gun kit contains 3/8 in x 15m (50 ft) hose, 1/4 in x 1,8m (6 ft) whip and XTR gun with 519 tip.

MOTOR PACKAGE	XL3400 MOTOR		XL6500 MOTOR					XL10000 MOTOR		
KING SPRAYER MODEL	XL30-220	XL40-180	XL45-290	XL50-250	XL60-220	XL70-180	XL90-145	XL45-430 [†]	XL70-290	XL80-250
Output per cycle	220cc	180cc	290cc	250cc	220cc	180cc	145cc	430cc	290cc	250cc
Maximum Working Pressure, bar (psi, MPa)	217 (3150, 21.7)	262 (3800, 26.2)	313 (4550, 31.3)	359 (5200, 35.9)	417 (6000, 41.7)	500 (7250, 50.0)	500 (7250, 50.0)	331 (4800, 33.1)	500 (7250, 50.0)	500 (7250, 50.0)
Maximum Air Input Pressure, bar (psi, MPa)	7 (100, .07)	7 (100, .07)	7 (100, .07)	7 (100, .07)	7 (100, .07)	7 (100, .07)	5.5 (80, .55)	7 (100, .07)	7 (100, .07)	6 (88, .60)
Output at 60 Cycles/min lpm (gpm)	12.9 (3.4)	11 (2.9)	17 (4.6)	15.2 (4.0)	12.9 (3.4)	11 (2.9)	8.7 (2.3)	25.4 (6.7)	17.4 (4.6)	15.1 (4)

For more information on Parts & Accessoires for high Pressure Protective Coating Equipment, see brochure 349392

[†] Uses Dura-Flo™ lower

King Heavy-Fluid, high pressure spray packages use XL10000 motor

Designed for gravity feed materials, with high viscosity and filled, requiring a filter-less pump lower for less plugging. Packages include 10 gal (38 L) SST hopper, no fluid filter, 3/4 in outlet check valve, 3/4 in x 50 ft (15 m) hose, 1/2 in x 25 ft (7.6 m) whip and XHF spray gun with 429 tip.

24X593 King XL70-290 Heavy-fluid* spray package

24X594 King XL80-250 Heavy-fluid* spray package

*Heavy-fluid materials vary and should be tested with a qualified distributor. Material should be pourable and self-levelling.


Parts & Accessories

King Sprayer Accessories

24X552	DataTrak kit for XL 3400, XL 6500, XL 10000 motors, no runaway solenoid	202659	Air motor lubricator oil
24X550	DataTrak kit for XL 3400, XL 6500, XL 10000 motors, with runaway solenoid	17V322	Low Noise Motor Conversion Kit for XL 3400 & XL 6500 Motors
116635	Air filter element	24X570	10-gal SST hopper kit for XL 3400, XL 6500, XL 10000 pkgs.
244841	King Cart Lubricator Kit	17V587	4-gun spray line manifold with ball valves, no independent flush
		262826	Gun Splitter, 2 guns, with independent flush
		206994	Throat Seal Liquid (TSL)

Xtreme-Duty Airless Hose & Adapters (for adding additional spray line)

H X X X X X

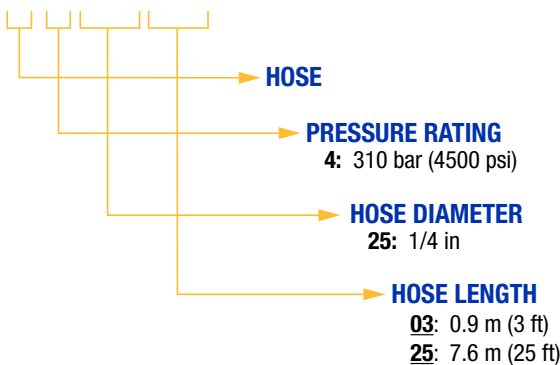

Example:

H53850 is a 386 bar (5600 psi), 3/8 in, 15.2 m (50 ft) hose

5: 386 bar (5600 psi)	7: 500 bar (7250 psi)
38: 3/8 in	50: 1/2 in
06: 1.8 m (6 ft)	10: 3 m (10 ft)
50: 15.2 m (50 ft)	1X: 30.5 m (100 ft)

Hex Reducing Nipples (for adapting hoses together)

164672	500 bar (7250 psi, 50 MPa), 3/8 npt (m), 1/4 npsm	158491	510 bar (7400 psi, 51 MPa), 1/2 npt (m), 1/2 npt (m)
156849	500 bar (7250 psi, 50 MPa), 3/8 npt (m), 3/8 npt (m)	159239	510 bar (7400 psi, 51 MPa), 1/2 npt (m), 3/8 npt (m)
162449	510 bar (7400 psi, 51 MPa), 1/2 npt (m), 1/4 npt (m)	162453	517 bar (7500 psi, 51.7 MPa), 1/4 npt (m), 1/4 npt (m)

XTR-5™ Airless Spray Guns

Maximum working pressure: 345 bar (5000 psi, 34.5 MPa)

XTR500	Round handle, four-finger trigger, no tip
XTR501	Round handle, four-finger trigger, 519 flat tip
XTR502	Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
XTR503	Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
XTR504	Round handle, four-finger trigger, 519 XHD RAC tip
XTR505	Round handle, two-finger trigger, 519 XHD RAC tip

XTR-7™ Airless Spray Guns

Maximum working pressure: 500 bar (7250 psi, 50.0 MPa)

XTR700	Round handle, four-finger trigger, no tip
XTR701	Round handle, four-finger trigger, 519 flat tip
XTR702	Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
XTR703	Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
XTR704	Round handle, four-finger trigger, 519 XHD RAC tip
XTR705	Round handle, two-finger trigger, 519 XHD RAC tip

Heater Kits (to reduce viscosity and improve cure times)

17V573 Kit, Heater Installation. Includes hardware for mounting any Viscon HP or HF fluid heater to a King Heavy-Duty cart.

High Pressure Viscon® Fluid Heaters, Non-Hazardous Location

Ref. manual 309524

245867	120 VAC, 2300 watts, 19.2 amps, 500 bar (7250 psi)
245868	200 VAC, 4000 watts, 20.0 amps, 500 bar (7250 psi)
245869	240 VAC, 4000 watts, 16.7 amps, 500 bar (7250 psi)
245870	480 VAC, 4000 watts, 8.3 amps, 500 bar (7250 psi)
246276	380 VAC, 4000 watts, 10.5 amps, 500 bar (7250 psi)

High Pressure Viscon® Fluid Heaters, Hazardous Location

Ref. manual 309524

245848	120 VAC, 2300 watts, 19.2 amps, 500 bar (7250 psi)
245862	200 VAC, 4000 watts, 20 amps, 500 bar (7250 psi)
245863	240 VAC, 4000 watts, 16.7 amps, 500 bar (7250 psi)
246254	380 VAC, 4000 watts, 10.5 amps, 500 bar (7250 psi)
245864	480 VAC, 4000 watts, 8.3 amps, 500 bar (7250 psi)

Viscon® HF, High Flow Fluid Heaters, Non-Hazardous Location

Ref. manual 3A2954

24P016	240 VAC, 5400 watts, 22.5 amps
---------------	--------------------------------

Viscon® HF, High Flow Fluid Heaters, Hazardous Location

Ref. manual 309524

24W248	240 VAC, 5400 watts, 22.5 amps, 500 bar (7250 psi)
---------------	--

Service Manuals online at www.graco.com

3A5422	King sprayers with XL 3400 or XL 6500 Air Motors - manual 3A5422	334644	XL 10000 Motor Parts - manual 334644
334645	King sprayers with XL 10000 Air Motor - manual 334645	311762	Xtreme Lower Parts & Repair Kits - manual 311762
3A5423	XL 3400, XL 6500 Motor Parts - manual 3A5423	311762	Ceramic ball check kits - manual 311762



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Distribution Center
Graco Distribution BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
38, Samsung 1-ro 1-gil
Hwaseong-si, Gyeonggi-do, 18449
Republic of Korea
Tel: 82 31 8015 0961
Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.COM

©2018 Graco Distribution BVBA 349980ENEU Rev. A 02/18 Printed in Europe.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners.