

Asphalt Mixing

External Electric Vibrators MVE

21



Description ▼

The range of “MVE” External Electric Motovibrators is the result of more than 50 years of experience in vibration technology for various industrial applications worldwide. OLI® External Electric Vibrators afford a guarantee of long-term durability reflecting the care taken over selection of components and the high level of precision adopted in manufacture.

Function ▼

In asphalt plants “MVE” External Electric Motovibrators are used for aiding aggregate flow from hoppers and silos to the drier drum, as well as additives from FIBC dischargers.



Application ▼

“MVE” External Electric Motovibrators are used in asphalt mixing plants where flow aids are required. Typical applications are as discharge aids for aggregates and subsequent cleaning of the aggregate hoppers.

Fitted on the hopper of an SBB-type FIBC Discharger, the MVE Electric Motovibrator ensures complete emptying of the additive from the bulk bag.

Benefits ▼

- ✓ Oversized SKF bearings;
- ✓ 2-years-warranty including electric components;
- ✓ Ex-stock delivery;
- ✓ Certificates available: Ex/CE/ETL/GOST/Baseefa/IEC/IECEx.



www.wamgroup.com

Asphalt Mixing


External Electric Vibrators MVE



Technical Features / Performance

- ▶ Aluminium casing up to size 50 (included), cast iron from size 60
- ▶ SKF bearings
- ▶ Operating temperature: -20° C to 40° C (-4° F to 104° F)
- ▶ Multiple voltages: 220-240/380-415 V, 50 Hz
- ▶ 750 - 1,000 - 1,500 - 3,000 R.P.M. (900 – 1,200 – 1,800 – 3,000 R.P.M.)
- ▶ Multiple fixing bores
- ▶ Motor protection: IP 66-NEMA 4
- ▶ Continuous duty: S1
- ▶ Insulation class: F
- ▶ Standard: ATEX Ex II 3D CERTIFIED
- ▶ Standard: ETL (UL-CSA) Class II Div.2
- ▶ ATEX Exe II 2 GD increased safety range available
- ▶ Explosion-proof range available

Overall Dimensions

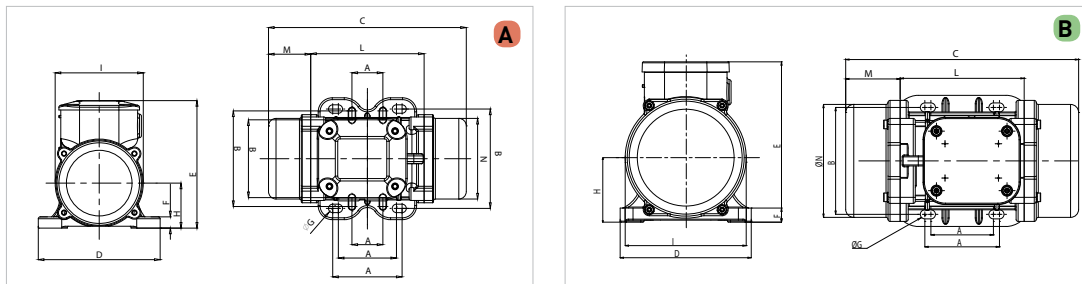

3 Phase		1 Phase		Overall dimension																				Weight							
Type 50 / 60 Hz	U.S. Market 60 Hz	Type 50 / 60 Hz	Drawing	Size	c		m		a		b		ø g		N° Holes	d		e		f		h		i		l		n		(Kg)	(Lb)
(mm)	(inch)	(mm)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
MVE 60/3	MVE 160/2	MVE 60/3M	A	10	211	8.31	45	1.77	62-74	2.44-2.91	106	4.17	9	0.35	4	130	5.12	136	5.35	12	0.47	48	1.89	94	3.70	121	4.76	85	3.35	4.2	9.3
MVE 100/3	MVE 220/2	MVE 100/3M	A	10	231	9.09	54	2.13	62-74	2.44-2.91	106	4.17	9	0.35	4	131	5.16	159	6.26	15	0.59	64	2.52	121	4.76	123	4.84	112	4.41	4.6	10.1
MVE 200/3	MVE 440/2	MVE 200/3M	B	20	231	9.09	54	2.13	62-74	2.44-2.91	106	4.17	9	0.35	4	131	5.16	159	6.26	15	0.59	64	2.52	121	4.76	123	4.84	112	4.41	7.0	15.4

MVE 3 Phase Series

3 Phase		Mechanical Features								Electric Features														
		Working moment (*)				FC				Power		Current		Power Factor				Ia/In		Class II 2D		Cable Type		Cable Gland
		Kg*cm		in*Lb		Kg		Lb		Kw		Hp		A max (Y)		50Hz		60Hz		Temp. Class	Temp. Class	Type	U.S. Market	
Type 50 / 60 Hz	U.S. Market 60 Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50 Hz	60 Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	T	(°C)	Class Temp.	Type: AWG (SOW) Class Temp.	Class Temp.
MVE 60/3	MVE 160/2	1.3	0.9	1.1	0.9	66	71	145.5	156.5	0.08	0.09	0.11	0.12	0.16	0.18	0.74	0.82	3	3	T4	100	461.5	18-4c	M16
MVE 100/3	MVE 220/2	1.9	1.3	1.7	1.1	98	95	216	209.4	0.1	0.11	0.13	0.15	0.19	0.18	0.76	0.85	3	3	T4	100	461.5	18-4c	M16
MVE 200/3	MVE 440/2	3.7	2.6	3.2	2.3	187	189	412.3	416.7	0.18	0.21	0.24	0.28	0.35	0.35	0.78	0.87	3.3	3.30	T4	100	461.5	18-4c	M16
MVE 202/3	MVE 444/2	3.7	2.6	3.2	2.3	187	189	412.3	416.7	0.18	0.21	0.24	0.28	0.35	0.35	0.78	0.87	3.3	3.30	T4	100	461.5	18-4c	M16
MVE 300/3	MVE 690/2	6.4	4.5	5.5	3.9	321	323	708	712.1	0.27	0.28	0.36	0.38	0.52	0.45	0.84	0.89	3.60	3.50	T4	100	462.5	16-4c	M20
MVE 400/3	MVE 890/2	7.9	5.7	6.9	4.9	407	411	897	906.1	0.30	0.36	0.40	0.48	0.58	0.60	0.88	0.88	3.50	3.50	T4	100	462.5	16-4c	M20
MVE 500/3	MVE 1200/2	10.3	7.4	8.9	6.4	530	534	1168.4	1177.3	0.50	0.58	0.67	0.78	0.96	0.97	0.84	0.87	4.00	4.20	T4	100	462.5	16-4c	M20
MVE 700/3	MVE 1700/2	14.9	10.6	12.9	9.2	758	765	1671.1	1686.5	0.66	0.75	0.89	1.01	1.25	1.24	0.83	0.88	4.30	5.00	T4	100	462.5	16-4c	M20
MVE 800/3	MVE 1800/2	15.7	11.1	13.6	9.6	794	800	1750.5	1763.7	0.75	0.90	1.01	1.21	1.45	1.50	0.79	0.84	3.80	3.80	T4	100	462.5	16-4c	M20