


Specific BPM Reference

The following chart illustrates the specific bpm for the full line of CP pneumatic hammers. Each bar represents the CP model(s) with the corresponding combination of specifications. In general, models with a lower weight and higher bpm are best for softer materials, and models with a higher weight and lower bpm are best for harder materials. The curved red line highlights this trend.



Hardness of Material →
 Units with the same bpm are available in multiple weights to suit the hardness of the material.
 ■ = CP models with these specifications → = Trend (material hardness increases with higher weight and lower bpm)

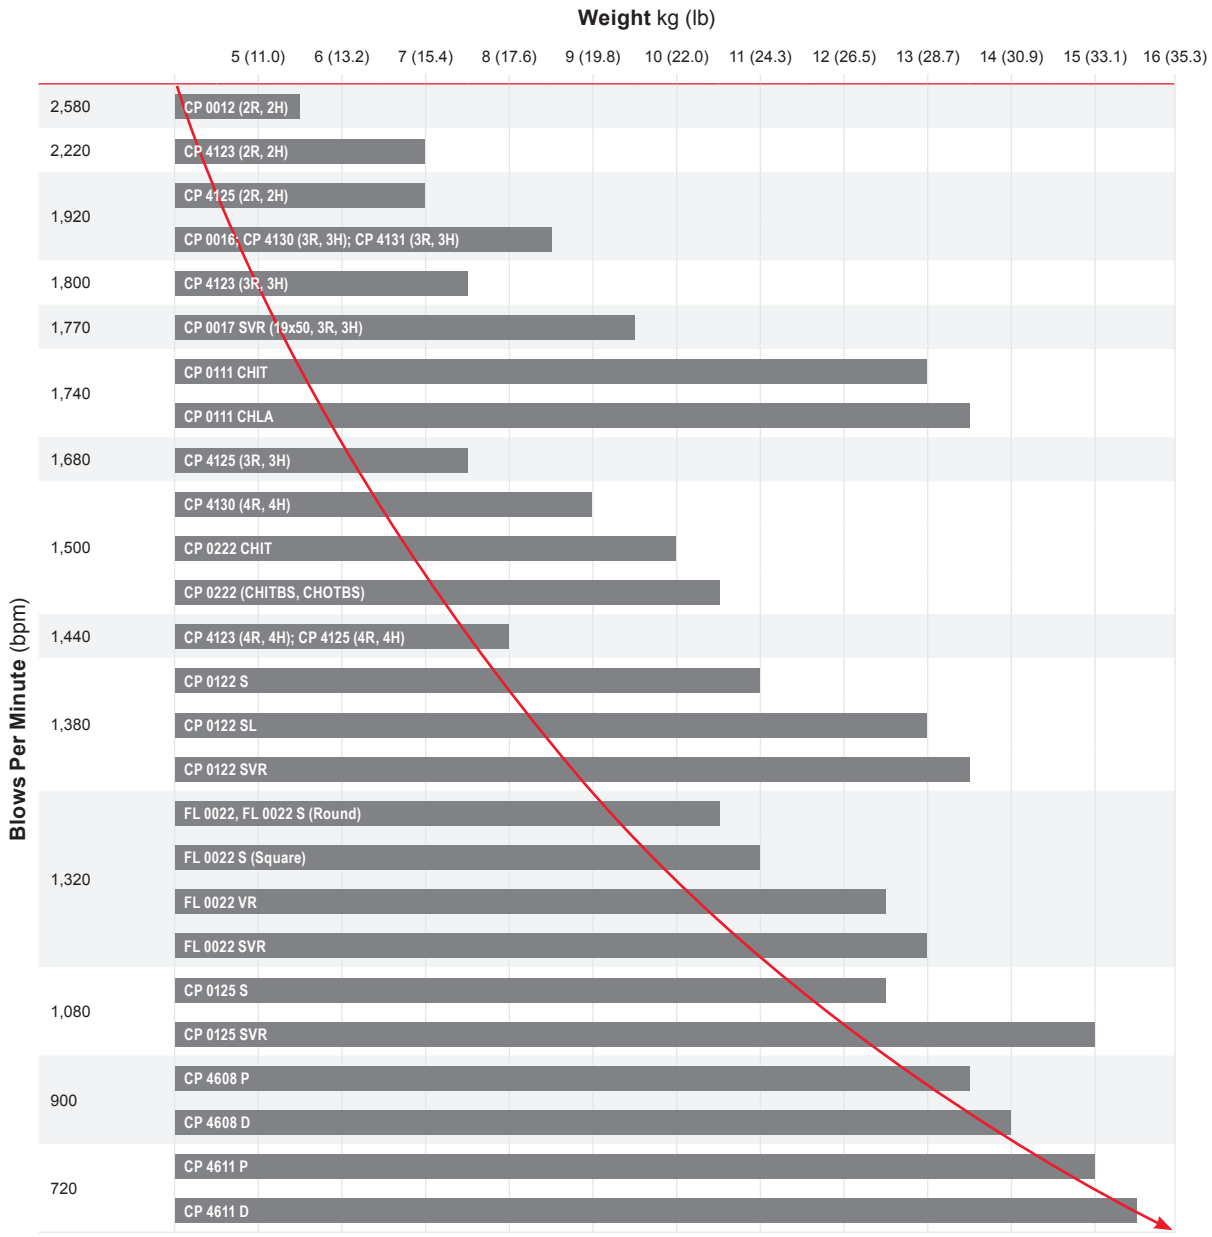

Reliable Power With Easy Handling

From chipping to cutting, CP chipping hammers balance reliable hitting power with easy handling for dependable performance in a wide range of environmental conditions. They're designed to deliver the optimal specific bpm for light and medium-hard renovation and construction tasks.

LIGHT AND MEDIUM MODELS:

CP 0012, CP 4123, CP 4125

CP chippers have a straightforward design for easy maintenance, as well as a teasing throttle for precise control. Other features include a rugged hardened steel cylinder and handle, and a choice of bushings.

4-BOLT MODELS:

CP 0016, CP 4130, CP 4131

These models combine CP power with a four-bolt, high-strength back-head for heavy-duty chipping, cutting and trimming. The durable four-bolt handle is easy to disassemble for maintenance, and all models include a muffler as standard. A quick-change retainer is also available to easily swap out steels when time is limited.

VIBRATION REDUCED MODEL:

CP 0017 SVR

For productivity in challenging working conditions, CP offers a model that significantly reduces vibrations without sacrificing hitting power. It's ideal for repair and refurbishing work on concrete, stone and brickwork.



CP 4125

- Pistol-grip handle
- Available in 2", 3" and 4" cylinder stroke versions
- Unique ring valve and chrome-plated cylinder for extra durability



CP 4131

- Bushing: .680" Round; .580" Hex
- 3" cylinder stroke version
- Designed for round collar chisels only
- Quick Change retainer is standard
- Muffler is standard



4-bolt flange increases durability, strength and ease of service



Reduce vibration without sacrificing hitting power



CP 4131



CP 4125



CP 0016

CHIPPING HAMMERS	CP 0012	CP 0012 2R	CP 0012 2H	CP 0016	CP 0017 SVR 19x50	CP 0017 SVR 3R	CP 0017 SVR 3H
Weight kg (lb)	5.5 (12)	5.5 (12)	5.5 (12)	8.5 (19)	9.5 (21)	9.5 (21)	9.5 (21)
Length mm (in)	406 (15.9)	406 (15.9)	406 (15.9)	420 (16.5)	540 (21.3)	535 (21.1)	535 (21.1)
Air Consumption l/s (cfm)	9.5 (20)	9.5 (20)	9.5 (20)	12 (25)	17 (36)	17 (36)	17 (36)
Blows Per Minute bpm	2,580	2,580	2,580	1,920	1,770	1,770	1,770
Vibration Level 3 Axes** (ISO 28927-10) m/s ²	14.6	14.6	14.6	9.6	12.4	12.4	12.4
Sound Power Level Guaranteed** (2000/14/EC) dB(A)	104	104	104	104	104	104	104
Sound Pressure Level** (ISO 11203) dB(A)	89	89	89	91	90	90	90
Retainer Type	Screw Cap	Spring	Spring	Screw Cap	Screw Cap	Spring	Spring
Air Inlet	3/8" BSP	3/8" NPTF	3/8" NPTF	3/8" BSP	1/2" BSP	1/2" NPT	1/2" NPT
Handle Type	D-Handle, Inside Trigger	D-Handle, Inside Trigger	D-Handle, Inside Trigger	D-Handle, Outside Trigger	D-Handle, Inside Trigger	D-Handle, Inside Trigger	D-Handle, Inside Trigger
Chuck Size mm (in)	Hex 19 x 50 (3/4 x 2)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Hex 19 x 50 (3/4 x 2)	Hex 19 x 50 (3/4 x 2)	Rd 17.3 (0.680)	Hex 14.7 (0.580)
Part Number	8900 0001 01	8900 0001 02	8900 0001 03	8900 0001 32	8900 0001 35	8900 0001 36	8900 0001 37



- CP 0012**
- D-handle
 - Muffler is standard

CHIPPING HAMMERS	CP 4123 2R	CP 4123 2H	CP 4123 3R	CP 4123 3H	CP 4123 4R	CP 4123 4H	CP 4125 2R	CP 4125 2H	CP 4125 3R
Weight kg (lb)	7 (15)	7 (15)	7.5 (17)	7.5 (17)	8 (18)	8 (18)	7 (15)	7 (15)	7.5 (17)
Length mm (in)	375 (14.8)	375 (14.8)	425 (16.7)	425 (16.7)	460 (18.1)	460 (18.1)	380 (15)	380 (15)	415 (16.3)
Air Consumption l/s (cfm)	12 (25)	12 (25)	14 (30)	14 (30)	13 (28)	13 (28)	13 (28)	13 (28)	15 (32)
Blows Per Minute bpm	2,220	2,220	1,800	1,800	1,440	1,440	1,920	1,920	1,680
Vibration Level 3 Axes** (ISO 28927-10) m/s ²	13.2	13.2	11.4	11.4	13.9	13.9	13.8	13.8	15.3
Sound Power Level Guaranteed** (2000/14/EC) dB(A)	-	-	-	-	-	-	-	-	-
Sound Pressure Level (ISO 11203) dB(A)	-	-	-	-	-	-	-	-	-
Retainer Type	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Air Inlet	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF
Handle Type	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip	Pistol Grip
Chuck Size mm (in)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)
Part Number	8900 0001 04*	8900 0001 05*	8900 0001 06*	8900 0001 07*	8900 0001 08*	8900 0001 09*	8900 0001 10*	8900 0001 11*	8900 0001 12*



- CP 4123**
- Pistol-grip handle
 - Available in 2", 3" and 4" cylinder stroke versions

CHIPPING HAMMERS	CP 4125 3H	CP 4125 4R	CP 4125 4H	CP 4130 3R	CP 4130 3H	CP 4130 4R	CP 4130 4H	CP 4131 3R	CP 4131 3H
Weight kg (lb)	7.5 (17)	8 (18)	8 (18)	8.5 (19)	8.5 (19)	9 (20)	9 (20)	8.5 (19)	8.5 (19)
Length mm (in)	415 (16.3)	445 (17.5)	445 (17.5)	420 (16.5)	420 (16.5)	450 (17.7)	450 (17.7)	420 (16.5)	420 (16.5)
Air Consumption l/s (cfm)	15 (32)	13 (28)	13 (28)	12 (25)	12 (25)	12.5 (26)	12.5 (26)	12 (25)	12 (25)
Blows Per Minute bpm	1,680	1,440	1,440	1,920	1,920	1,500	1,500	1,920	1,920
Vibration Level 3 Axes** (ISO 28927-10) m/s ²	15.3	14.6	14.6	9.6	9.6	12.3	12.3	9.6	9.6
Sound Power Level Guaranteed** (2000/14/EC) dB(A)	-	-	-	104	104	104	104	104	104
Sound Pressure Level** (ISO 11203) dB(A)	-	-	-	90	90	90	90	91	91
Retainer Type	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Quick Change	Quick Change
Air Inlet	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF	3/8" NPTF
Handle Type	Pistol Grip	Pistol Grip	Pistol Grip	D-Handle, Outside Trigger	D-Handle, Outside Trigger	D-Handle, Outside Trigger	D-Handle, Outside Trigger	D-Handle, Outside Trigger	D-Handle, Outside Trigger
Chuck Size mm (in)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)	Rd 17.3 (0.680)	Hex 14.7 (0.580)
Part Number	8900 0001 13*	8900 0001 14*	8900 0001 15*	8900 0001 16	8900 0001 17	8900 0001 18	8900 0001 19	8900 0001 33	8900 0001 34



- CP 0016**
- Slim and light screw-on retainer formoil points and chisels
 - Muffler is standard



- CP 4130**
- Bushing: .680" Round; .580" Hex
 - 3" or 4" cylinder stroke version
 - Muffler is standard



- CP 0017 SVR**
- Reliable, easy-to-maintain isolator assembly unit
 - Closed-grip D-handle for operator comfort

* Not for sale within EU/EEA.

**Full details of measurement are available in the Safety and Operating Instruction of the product. It can be found on www.cpprintshop.com.