

EKA BLACK

ANTISTATEX® RANGE



EKA BLACK is a new excellent product for special applications.

The product combines the capacity for high rates of material removal with the ability to present an excellent surface finish with even scratch pattern.

The Antistatex® bonding system provides a fully antistatic effect which reduces clogging of the product and minimizes dust load on the sanding surface.

TECHNICAL SPECIFICATION

- Backing:** E-, F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic - Antistatex®
- Grit:** Silicon Carbide
- Coating:** Semi open
- A-range:** #80 - #400
- B-range:** #60
- Width:** 1370 mm, 1420 mm on request

APPLICATIONS

Product for calibration, intermediate and finishing sanding of material that is tuff to sand.


Wood: Hard wood

Board: MDF, Particleboard

Lacquer: Hard UV-lacquer for flooring

Specials: Composite board,
Stainless Steel

RECOMMENDED FORMS

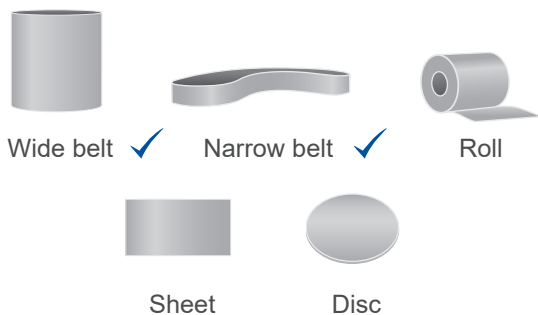

EKAMANT

SWEDISH QUALITY COATED ABRASIVES

Ekamant AB, Järnvägsgatan 44, SE-285 23 Markaryd, Sweden / www.ekamant.com