




NS100

Non-Sparking Metric Slogging Open Wrenches Aluminium Bronze



PRODUCT DETAILS

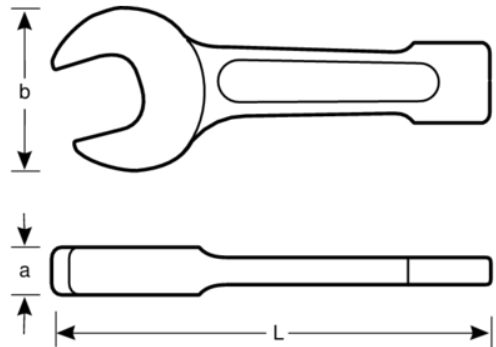

- Made of aluminium bronze
- 15° head angle
- Slogging open-end wrench used with a hammer to tighten large nuts and bolts
- Fulfils product standard DIN 133
- Non-sparking (NS) tools designed for use in potentially explosive environments, where 'traditional' steel tools may create spark
- 15° head angle for optimum access



Follow the Fish!



PRODUCT ATTRIBUTES

Product	L	b	a		
NS100-100	485 mm	228 mm	43 mm	100 mm	10410 g
NS100-105	485 mm	228 mm	43 mm	105 mm	10300 g
NS100-110	513 mm	238 mm	45 mm	110 mm	12600 g
NS100-115	513 mm	238 mm	45 mm	115 mm	11830 g
NS100-120	530 mm	253 mm	51 mm	120 mm	14320 g
NS100-17	125 mm	40,5 mm	11 mm	17 mm	123 g
NS100-19	125 mm	40,5 mm	11 mm	19 mm	125 g
NS100-22	135 mm	46 mm	12 mm	22 mm	155 g
NS100-24	150 mm	50 mm	12 mm	24 mm	200 g
NS100-25	150 mm	50 mm	12 mm	25 mm	220 g
NS100-27	175 mm	56 mm	15 mm	27 mm	350 g
NS100-28	175 mm	57 mm	15 mm	28 mm	355 g
NS100-29	190 mm	64 mm	15,5 mm	29 mm	418 g
NS100-30	190 mm	64 mm	16 mm	30 mm	430 g
NS100-32	190 mm	65 mm	17 mm	32 mm	460 g
NS100-33	190 mm	66 mm	16 mm	33 mm	442 g
NS100-34	200 mm	71 mm	17 mm	34 mm	540 g
NS100-35	210 mm	75 mm	18,5 mm	35 mm	600 g
NS100-36	210 mm	74 mm	18,5 mm	36 mm	640 g
NS100-37	210 mm	75 mm	18,5 mm	37 mm	640 g
NS100-38	220 mm	82 mm	19 mm	38 mm	830 g
NS100-41	230 mm	86 mm	18,5 mm	41 mm	900 g
NS100-42	230 mm	87 mm	18,5 mm	42 mm	885 g
NS100-45	250 mm	98 mm	20 mm	45 mm	1090 g
NS100-46	250 mm	98 mm	20 mm	46 mm	1095 g
NS100-47	250 mm	96 mm	20 mm	47 mm	1100 g
NS100-50	275 mm	106 mm	20,5 mm	50 mm	1400 g
NS100-52	275 mm	108 mm	20,5 mm	52 mm	1380 g
NS100-54	305 mm	117 mm	23 mm	54 mm	1825 g
NS100-55	305 mm	117 mm	23 mm	55 mm	1830 g
NS100-56	305 mm	117 mm	23 mm	56 mm	1835 g
NS100-58	315 mm	128 mm	23,5 mm	58 mm	2115 g
NS100-60	315 mm	125 mm	23,5 mm	60 mm	2140 g
NS100-63	335 mm	140 mm	27 mm	63 mm	2740 g
NS100-65	335 mm	140 mm	23,5 mm	65 mm	2780 g
NS100-67	335 mm	140 mm	23,5 mm	67 mm	2785 g
NS100-70	370 mm	156 mm	28,5 mm	70 mm	3610 g
NS100-71	370 mm	156 mm	28,5 mm	71 mm	3620 g
NS100-75	375 mm	161 mm	29 mm	75 mm	4030 g
NS100-77	375 mm	161 mm	29 mm	77 mm	4040 g
NS100-80	400 mm	174 mm	32 mm	80 mm	5080 g
NS100-82	400 mm	174 mm	32 mm	82 mm	5085 g
NS100-85	400 mm	174 mm	32 mm	85 mm	5140 g
NS100-88	445 mm	194 mm	37,5 mm	88 mm	6950 g
NS100-90	445 mm	194 mm	37,5 mm	90 mm	6960 g
NS100-94	445 mm	194 mm	37,5 mm	94 mm	6750 g
NS100-95	445 mm	194 mm	37,5 mm	95 mm	6700 g

