



## HD 9/50-4 Cage

This product uses up to 500 bar of pressure to remove even the most stubborn dirt. The robust cage design provides all-round protection and enables safe crane loading. With sack-trolley principle for easy transportation.



### 1 High-performance crankshaft pump

- Reliable and durable Kärcher high-performance crankshaft pump ensures optimal pressure.

### 2 Safe storage

- Accessories and tools are stored in a protected compartment. This means that everything is always in its place.



## HD 9/50-4 Cage

- Robust industrial gun
- Dry run protection (optional)

### Technical data

Order no.	1.367-156.0	
EAN code	4039784731011	
Working pressure	bar / MPa	150-500 / 15-50
Flow rate	l/h	500-900
Max. inlet temperature	°C	max. 60
Pump type	Maximum performance Kärcher crankshaft pump	
Drive	E-Motor 400 V / 50 Hz	
Motor rating	kW	15
Weight	kg	190
Dimensions (L × W × H)	mm	930 × 800 × 920

### Equipment

Electro start	-	
High-pressure hose	m	10 / Heavy duty
Spray gun	Industrial trigger gun	
Stainless steel lance	mm	700
Flat jet nozzle	■	
Safety valve	■	
Elapsed time counter	■	

■ Included in the scope of supply.

# ACCESSORIES FOR HD 9/50-4 CAGE

## 1.367-156.0

**KÄRCHER**




		Order no.	Length					Price	Description	
<b>High-pressure hoses</b>										
Pressure hose	1	6.391-848.0							650 bar, M 22 x 1.5	■
	2	6.391-856.0							650 bar, M 22 x 1.5.	□
	3	6.391-857.0								□
	4	6.391-020.0							Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 x 1.5. Suitable for up to 640 bar working pressure.	□
	5	6.391-846.0							650 bar, M 22 x 1.5	□
	6	6.391-847.0							650 bar, M 22 x 1.5.	□
	7	6.391-019.0							Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 x 1.5. Suitable for up to 620 bar working pressure.	□
<b>Trigger guns</b>										
Kärcher industry gun	8	4.775-824.0							650 bar - industrial spray gun with optimised flow. Robustness and durability for professional use. Food-safe and saltwater-resistant materials. Connector for HP hoses M 22 x 1.5.	■
Shoulder support	9	2.639-251.0							Sturdy shoulder support that must be used from a recoil force of more than 150 N. Fits all Kärcher industrial lances.	□
<b>Spray lances</b>										
Spray lance	10	4.760-679.0							With nozzle holder.	■
	11	4.760-653.0								□
	12	4.760-675.0								□
	13	4.760-677.0								□
Spray lance extension	14	4.760-699.0							Spray lance extension 800 mm, 65 MPa.	□
<b>Power nozzles</b>										
Flat jet nozzle	15	5.765-164.0							15°, 500 bar, 900 l/h (electr.)	■
Detail nozzle	16	5.765-159.0							500 bar, 900 l/h (electr.)	□
<b>Attachment kits</b>										
ABS protection against dry run	17	2.641-922.0							For electric motors.	□
ABS protection against water shortage	18	2.851-028.0							ABS steering rollers.	□
<b>Kupplungen und Verbinder</b>										
Grease for stainless steel threaded joints	19	6.280-180.0							Grease for stainless steel screw connections.	□
Coupling	20	4.403-004.0							For connecting and extending HP hoses. Connection 2 x M22 x 1.5. Brass with rubber protection.	□
<b>Single-jet rotary nozzles</b>										
F8 power rotary jet	21	6.415-915.0							500 bar, 1.05 mm, 900 l/h, M 20 x 1, stainless steel.	□
F8 power rotary jet repair kit	22	6.025-437.0							Repair kit for power rotary Jet, Order No. 6.415-915.0. Suitable for 500 bar pressure and 900 l/h water flow. Includes rotor, seat and O-ring (28 x 2).	□
Tool for changing rotor seat	23	6.025-233.0							For single-jet rotary nozzles.	□
<b>Pipe cleaning</b>										
Foot valve for pipe cleaning	24	6.470-223.0							Foot valve for convenient and safe use of accessories for effective pipe cleaning.	□
Pipe cleaning nozzle, standard	25	5.763-093.0							Standard pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward.	□

■ Included in the scope of supply. □ Available accessories.

# ACCESSORIES FOR HD 9/50-4 CAGE

## 1.367-156.0

**KÄRCHER**

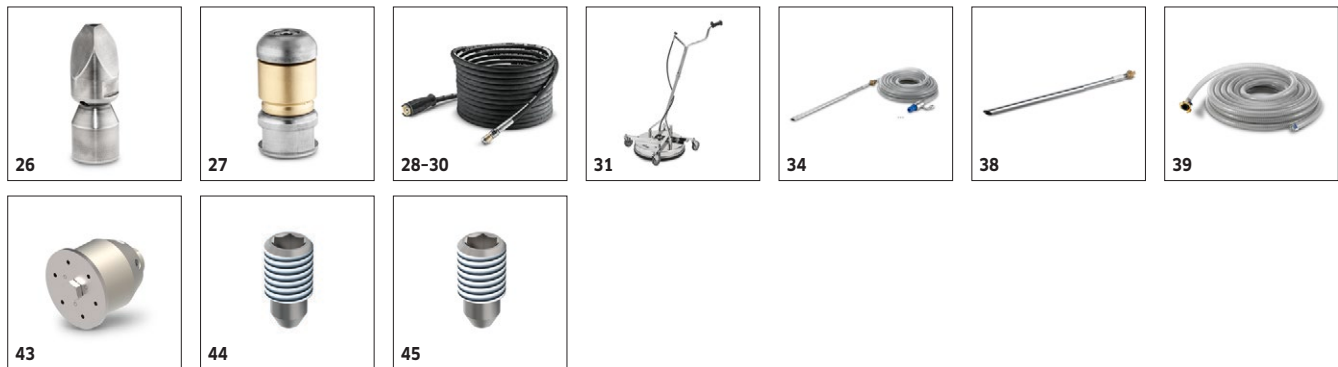

		Order no.	Length				Price	Description	
Pipe cleaning nozzle, Quattro	26	5.763-094.0						Quattro pipe cleaning nozzle (500/15) for pipe cleaning hoses with G1/4" threaded connection. The chisel point nozzle configuration is 3x backward and 1x forward.	<input type="checkbox"/>
Pipe cleaning nozzle, Rotor	27	5.763-095.0						Rotor pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward.	<input type="checkbox"/>
Pipe cleaning hose	28	6.392-401.0						Flexible pressure hose (DN 8) for thorough pipe cleaning. 10 m long. Threaded connection for G1/4" nozzle.	<input type="checkbox"/>
	29	6.392-402.0						Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long.	<input type="checkbox"/>
	30	6.392-403.0						For through pipe cleaning: flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle.	<input type="checkbox"/>
<b>Surface cleaner</b>									
Surface Cleaner FRI 50 Me	31	2.643-577.0						Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately.	<input type="checkbox"/>
Nozzle package 015 FRI 50 Me	32	6.415-044.0						Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 015.	<input type="checkbox"/>
<b>Abrasive blaster</b>									
Required adapter for abrasive blasters	33	5.401-325.0						M 20 x 1 IG to 9/16" UNF AG.	<input type="checkbox"/>
Abrasive blaster	34	6.025-253.0						Abrasive spray head for wet sand blasting. Nozzle size: 3 x 0.6. Only includes spray head. Without hose and lance.	<input type="checkbox"/>
Replacement nozzle for abrasive blaster	35	6.025-346.0						Replacement nozzle for abrasive spray head made from boron carbide. Colour blue.	<input type="checkbox"/>
F98 nozzle for abrasive blaster	36	6.025-434.0						0.6 mm, 3 pcs.	<input type="checkbox"/>
Nozzle F98 for abrasive blaster	37	6.025-256.0						0.6 mm	<input type="checkbox"/>
Suction lance	38	6.025-258.0						For the suction of spray agents.	<input type="checkbox"/>
Abrasive material hose	39	6.025-308.0						Abrasive hose.	<input type="checkbox"/>
Mounting tool for nozzle set	40	6.025-257.0						For F98 nozzles.	<input type="checkbox"/>
Abrasive	41	6.025-309.0						25 kg, 0.5-1.00 mm, garnet sand.	<input type="checkbox"/>
	42	6.025-310.0						25 kg, 0.7-1.40 mm, garnet sand.	<input type="checkbox"/>
<b>Multi-jet rotary nozzles</b>									
Nozzle carrier head	43	9.899-828.0						Nozzle holder for F21 nozzle. Suitable for working pressures of up to 3000 bar. 35° spray angle, includes guard and flow conditioner.	<input type="checkbox"/>
<b>Screw nozzles F21</b>									
F21 dummy nozzle - no hole	44	6.025-237.0						F21 screw-on dummy nozzle for working pressures of up to 3000 bar.	<input type="checkbox"/>
Round jet nozzle	45	6.025-222.0						F21 screw-on sapphire round jet nozzle, 0.70 mm diameter, suitable for working pressures of up to 3000 bar.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.