



Ultra heavy duty double chain reforming alignment clamp

Range: 10" - 240"


The E-Z Fit Double Chain pipe clamp is an extra heavy duty clamp designed for alignment and reforming of pipes and vessels up to 20' (6M) with up to schedule 80 wall thickness. The double chain clamp will align pipes with any wall schedule.

Our specialised triple jackscrew heavy duty jackbars and double chain lock devices can deal with the most difficult of reforming jobs with operational ease.

The extra heavy duty jackbars and double main block provide the strength to accomplish reforming jobs on pipe wall thicknesses that other clamps simply cannot. Models 10" - 36" to 10" - 54" can use level and support devices and all other models with cable hoists which can all be purchased as an accessory.


The E-Z Fit Double Chain pipe clamps are available as stainless steel models with stainless steel contact points and chain to enable the welding of exotic materials with no risk of contamination. All clamps are supplied in their own durable storage cases.

Clamps can also be supplied with an optional torque wrench to apply the correct tension to the chain (150nm). This allows the exact required tension to be applied to the chain.

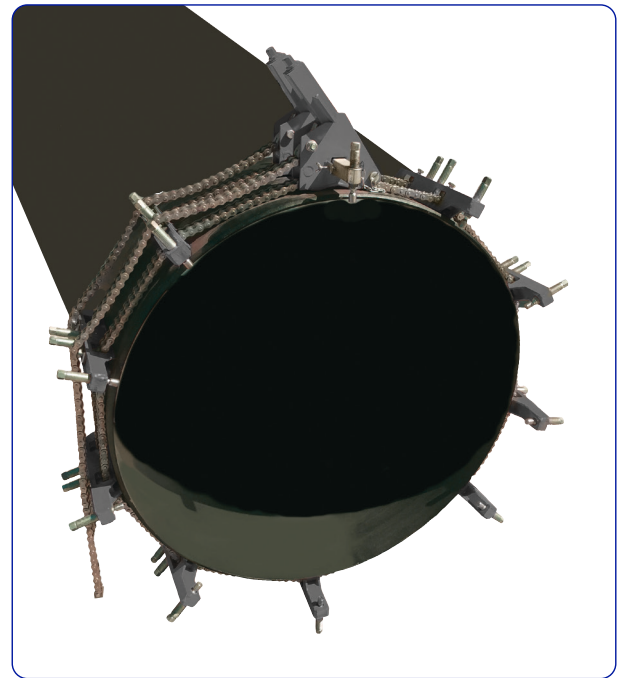


Features and advantages:

- **Precision alignment** - The double jackbars, spaced around the outside diameter of the pipe, provide accurate alignment and reforming of the internal or external diameters of both pipes within 0.5 mm
- **Extremely tough** - Reforms pipes on both sides of the weld joint to schedule 80, aligns all wall schedules, elbows, tees and other fittings
- **Adaptable** - The chain clamp can be used to align, and reform elbow, tees and other fittings that a cage clamp cannot cope with. One chain clamp covers the range of up to 100 cage clamps
- **Extra heavy duty independent jackbars** - Enable the operator to form the pipe to the required shape. Each jackbar has three (3) independently pivoting Jackscrews to cope with uneven surfaces
- **Versatile** - Elbows, tees and other fittings can be aligned with the level and support device

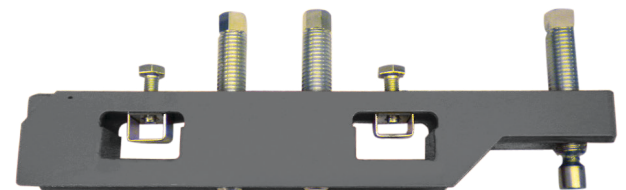

Heavy duty jackbars for arduous aligning and reforming jobs

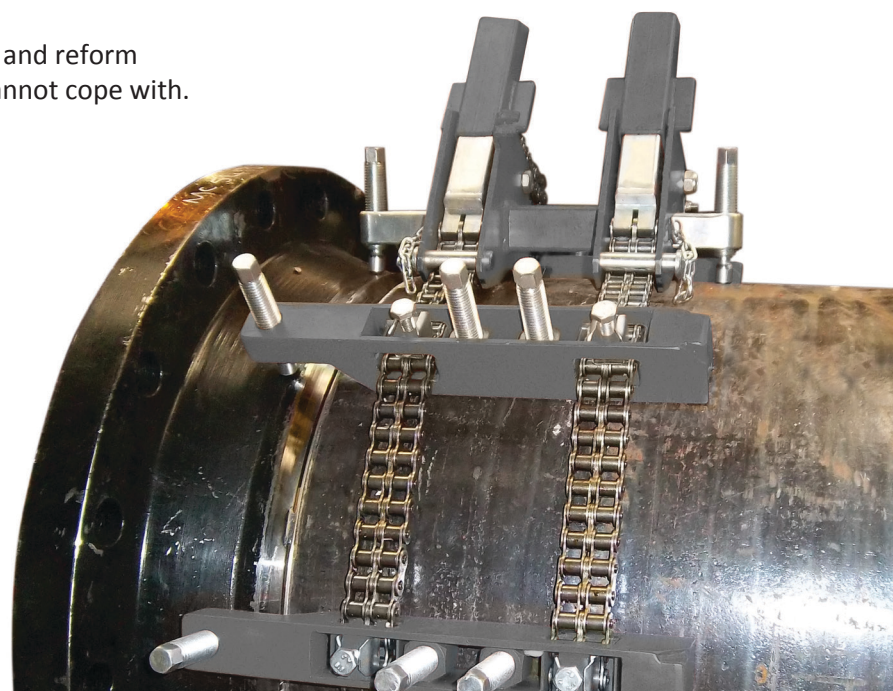


E-Z Fit Double chain clamp includes:

- Length of chain required for the pipe range
- Extra heavy duty jackbars listed for the pipe range
- Number of main blocks listed for the pipe range
- Two fine adjustments
- Level and support device (larger clamps supplied with cable hoist)
- Jackscrew wrench
- Operating instructions

Optional:

- Torque wrench
- Carbon or stainless steel spacing screws
- Additional jackbars and jackscrews
- Additional chain

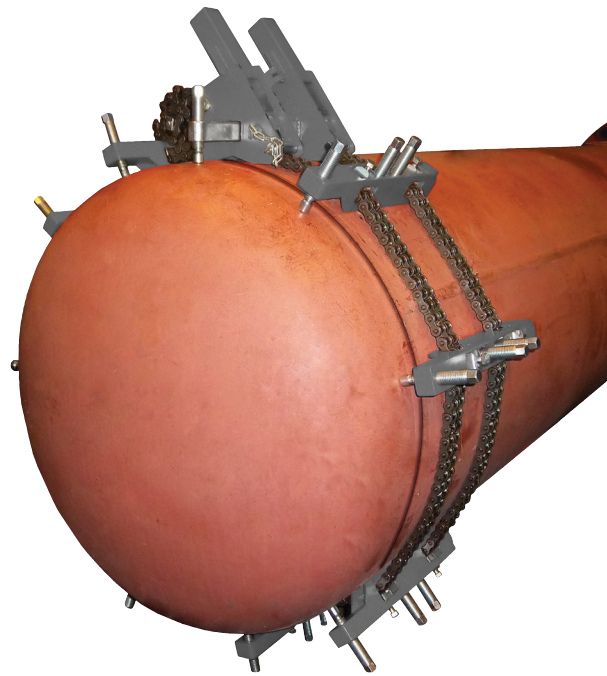

Sizes available

PART NO.	PIPE DIAMETER RANGE (INCH / MM)		NUMBER OF JACKBARS	NUMBER OF MAIN BLOCKS	SHIPPING WEIGHT (LBS. / KG)	
EZDCC10-36	10 - 36"	273 - 915 mm	9	1	220 lbs.	100 kg
* EZDCC10-36 SS	10 - 36"	273 - 915 mm	9	1	220 lbs.	100 kg
EZDCC10-48	10 - 48"	273 - 1,220 mm	12	1	278 lbs.	126 kg
* EZDCC10-48 SS	10 - 48"	273 - 1,220 mm	12	1	278 lbs.	126 kg
EZDCC10-54	10 - 54"	273 - 1,375 mm	14	1	300 lbs.	136 kg
* EZDCC10-54 SS	10 - 54"	273 - 1,375 mm	14	1	300 lbs.	136 kg
EZDCC10-60	10 - 60"	273 - 1,525 mm	16	1	328 lbs.	149 kg
* EZDCC10-60 SS	10 - 60"	273 - 1,525 mm	16	1	328 lbs.	149 kg
EZDCC10-72	10 - 72"	273 - 1,830 mm	20	1	387 lbs.	176 kg
* EZDCC10-72 SS	10 - 72"	273 - 1,830 mm	20	1	387 lbs.	176 kg
EZDCC10-84	10 - 84"	273 - 2,135 mm	24	2	442 lbs.	200 kg
* EZDCC10-84 SS	10 - 84"	273 - 2,135 mm	24	2	442 lbs.	200 kg
EZDCC10-96	10 - 96"	273 - 2,440 mm	28	2	498 lbs.	226 kg
* EZDCC10-96 SS	10 - 96"	273 - 2,440 mm	28	2	498 lbs.	226 kg
EZDCC10-108	10 - 108"	273 - 2,745 mm	32	2	554 lbs.	251 kg
* EZDCC10-108 SS	10 - 108"	273 - 2,745 mm	32	2	554 lbs.	251 kg
EZDCC10-120	10 - 120"	273 - 3,050 mm	36	2	610 lbs.	277 kg
* EZDCC10-120 SS	10 - 120"	273 - 3,050 mm	36	2	610 lbs.	277 kg
EZDCC10-132	10 - 132"	273 - 3,355 mm	39	2	660 lbs.	299 kg
* EZDCC10-132 SS	10 - 132"	273 - 3,355 mm	39	2	660 lbs.	299 kg
EZDCC10-144	10 - 144"	273 - 3,715 mm	42	2	710 lbs.	322 kg
* EZDCC10-144 SS	10 - 144"	273 - 3,715 mm	42	2	710 lbs.	322 kg
EZDCC10-168	10 - 168"	273 - 4,270 mm	48	3	810 lbs.	367 kg
* EZDCC10-168 SS	10 - 168"	273 - 4,270 mm	48	3	810 lbs.	367 kg
EZDCC10-192	10 - 192"	273 - 4,880 mm	54	3	910 lbs.	410 kg
* EZDCC10-192 SS	10 - 192"	273 - 4,880 mm	54	3	910 lbs.	410 kg
EZDCC10-216	10 - 216"	273 - 5,490 mm	60	3	1,010 lbs.	455 kg
* EZDCC10-216 SS	10 - 216"	273 - 5,490 mm	60	3	1,010 lbs.	455 kg
EZDCC10-240	10 - 240"	273 - 6,100 mm	66	3	1,110 lbs.	500 kg
* EZDCC10-240 SS	10 - 240"	273 - 6,100 mm	66	3	1,110 lbs.	500 kg

* Suitable for stainless steel

Larger sizes available upon request