




NS104

**Non-Sparking Metric Slogging Ring
Wrenches Aluminium Bronze**



PRODUCT DETAILS

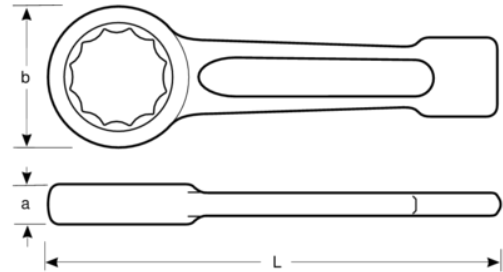

- Made of aluminium bronze
- Slogging ring wrench used with a hammer to tighten large nuts and bolts
- Fulfils product standard DIN 7444
- Non-sparking (NS) tools designed for use in potentially explosive environments, where 'traditional' steel tools may create spark



Follow the Fish!



PRODUCT ATTRIBUTES

Product		B	a	L	
NS104-24	24 mm	42 mm	14 mm	165 mm	210 g
NS104-27	27 mm	46 mm	16 mm	175 mm	280 g
NS104-30	30 mm	50 mm	16 mm	185 mm	380 g
NS104-32	32 mm	53 mm	16 mm	185 mm	390 g
NS104-36	36 mm	58 mm	19 mm	205 mm	500 g
NS104-41	41 mm	64 mm	20 mm	225 mm	650 g
NS104-46	46 mm	73 mm	22 mm	235 mm	890 g
NS104-50	50 mm	78 mm	24 mm	250 mm	1030 g
NS104-55	55 mm	86 mm	24 mm	265 mm	1250 g
NS104-60	60 mm	93 mm	26 mm	274 mm	1480 g
NS104-70	70 mm	108 mm	32 mm	320 mm	2300 g
NS104-75	75 mm	113 mm	33 mm	326 mm	2540 g
NS104-80	80 mm	124 mm	35 mm	350 mm	3200 g
NS104-85	85 mm	130 mm	37 mm	350 mm	3420 g
NS104-90	90 mm	135 mm	39 mm	380 mm	4180 g
NS104-95	95 mm	142 mm	39 mm	390 mm	4300 g
NS104-17	17 mm	32 mm	12 mm	145 mm	140 g
NS104-19	19 mm	32 mm	12 mm	145 mm	120 g
NS104-20	20 mm	38 mm	13 mm	155 mm	180 g
NS104-22	22 mm	38 mm	13 mm	155 mm	160 g
NS104-25	25 mm	42 mm	14 mm	165 mm	210 g
NS104-26	26 mm	46 mm	16 mm	175 mm	315 g
NS104-28	28 mm	46 mm	16 mm	175 mm	280 g
NS104-29	29 mm	50 mm	16 mm	185 mm	430 g
NS104-31	31 mm	53 mm	16 mm	185 mm	430 g
NS104-33	33 mm	55 mm	18 mm	200 mm	490 g
NS104-34	34 mm	55 mm	18 mm	200 mm	460 g
NS104-35	35 mm	58 mm	19 mm	205 mm	520 g
NS104-37	37 mm	61 mm	20 mm	215 mm	620 g
NS104-38	38 mm	61 mm	20 mm	215 mm	620 g
NS104-39	39 mm	61 mm	19 mm	215 mm	620 g
NS104-40	40 mm	64 mm	20 mm	225 mm	680 g
NS104-42	42 mm	64 mm	20 mm	225 mm	680 g
NS104-43	43 mm	64 mm	20 mm	225 mm	680 g
NS104-44	44 mm	73 mm	23 mm	235 mm	830 g
NS104-45	45 mm	73 mm	22 mm	235 mm	890 g
NS104-47	47 mm	73 mm	22 mm	235 mm	890 g
NS104-48	48 mm	78 mm	24 mm	250 mm	1060 g
NS104-49	49 mm	78 mm	23 mm	250 mm	1030 g
NS104-51	51 mm	78 mm	23 mm	250 mm	1030 g
NS104-52	52 mm	78 mm	23 mm	250 mm	1030 g
NS104-53	53 mm	86 mm	24 mm	265 mm	1300 g
NS104-54	54 mm	86 mm	24 mm	265 mm	1300 g
NS104-56	56 mm	86 mm	24 mm	265 mm	1300 g
NS104-57	57 mm	86 mm	24 mm	265 mm	1300 g
NS104-58	58 mm	92 mm	26 mm	274 mm	1450 g
NS104-59	59 mm	92 mm	26 mm	274 mm	1450 g
NS104-61	61 mm	92 mm	26 mm	274 mm	1450 g
NS104-62	62 mm	92 mm	26 mm	274 mm	1450 g
NS104-63	63 mm	102 mm	30 mm	398 mm	1800 g
NS104-64	64 mm	102 mm	30 mm	298 mm	1800 g
NS104-65	65 mm	102 mm	30 mm	298 mm	1800 g
NS104-100	100 mm	148 mm	45 mm	410 mm	5280 g
NS104-105	105 mm	155 mm	43 mm	420 mm	5640 g
NS104-110	110 mm	162 mm	45 mm	445 mm	7150 g
NS104-115	115 mm	168 mm	45 mm	450 mm	8850 g
NS104-120	120 mm	182 mm	50 mm	480 mm	9380 g
NS104-66	66 mm	102 mm	30 mm	298 mm	1800 g
NS104-67	67 mm	108 mm	32 mm	320 mm	2200 g
NS104-68	68 mm	108 mm	32 mm	320 mm	2200 g
NS104-69	69 mm	108 mm	32 mm	320 mm	2200 g
NS104-71	71 mm	108 mm	32 mm	320 mm	2200 g
NS104-72	72 mm	108 mm	32 mm	320 mm	2200 g
NS104-73	73 mm	113 mm	33 mm	326 mm	2720 g
NS104-74	74 mm	113 mm	33 mm	326 mm	2720 g
NS104-76	76 mm	113 mm	33 mm	326 mm	2490 g
NS104-77	77 mm	113 mm	33 mm	326 mm	2720 g
NS104-78	78 mm	124 mm	34 mm	350 mm	3250 g
NS104-79	79 mm	124 mm	34 mm	350 mm	3250 g
NS104-81	81 mm	124 mm	34 mm	350 mm	3250 g
NS104-82	82 mm	124 mm	35 mm	345 mm	3110 g
NS104-83	83 mm	130 mm	36 mm	355 mm	3915 g
NS104-84	84 mm	130 mm	36 mm	355 mm	3915 g
NS104-86	86 mm	130 mm	36 mm	355 mm	3915 g
NS104-87	87 mm	130 mm	36 mm	355 mm	3915 g
NS104-88	88 mm	135 mm	39 mm	380 mm	4700 g
NS104-89	89 mm	135 mm	39 mm	380 mm	4700 g
NS104-92	92 mm	135 mm	39 mm	380 mm	4700 g
NS104-94	94 mm	142 mm	39 mm	390 mm	4820 g
NS104-98	98 mm	148 mm	43 mm	410 mm	6100 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com