


Facts

- Cuts high-strength reinforcing steel up to Ø 32 mm (ASTM A615 #10)
- Cold-cutting process – no sparks, no open flame
- Precise cuts even in demanding conditions
- Easy and quick replacement of cutting inserts
- Developed for demolition, dismantling, and the precise cutting of reinforcing steel

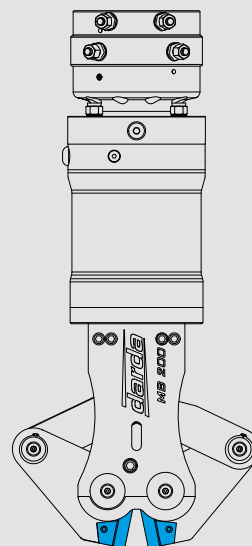

Specifications | Rebar Cutter MB200

Dimensions and weight		
Length x Width x Height	895 x 415 x 232 mm	35.2 x 16.3 x 9.1 in
Jaw opening	110 mm	4.3 in
Cutting depth, approx.	70 mm	2.5 in
Weight ¹	165 kg	363 lb
Carriers		
Recommended carrier weight, max. ²	1,2 - 2,8 t	2640 - 6160 lb
Recommended Brokk machines	Brokk 110/120D / 170	
Hydraulic connection		
Connection pressure, min.	17,5 MPa	2538 psi
Connection pressure, max.	19 MPa	2756 psi
Oil flow, min. - max.	25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.	19 MPa	2756 psi
Rotary drive oil flow, max.	60 l/min	16 gal/min
Power output		
Cutting force, max.	2059 kN (210 t)	462900 lbf
Cutting capacity (selection of profiles)		
● Ø 32 mm S355	ASTM A615 #10	

¹ Without mounting plate

² Depending on carrier lifting capacity