



HD 25/15-4 Cage Plus

Ideal for water-intensive cleaning tasks: the HD 25/15-4 Cage Plus high-pressure cleaner with 150 bar working pressure, a water flow rate of 2,500 l/h and a stainless steel frame.



4-6 h



SERVO CONTROL



FLAT FREE TIRES



EASY!Force

1 Cage frame

- Robust outer pipe frame.
- With integrated crane hook and accessory compartment.

2 Electronic monitoring for greater operational safety.

- Leakage protection and soft start.
- Overvoltage and undervoltage protection.



HD 25/15-4 Cage Plus

- High-grade steel frame
- Automatic soft start, leakage protection, dry-running protection, protection against two-phase short circuit
- Puncture-proof wheels for maximum mobility

Technical data

Order no.	1.353-907.0	
EAN code	4054278157917	
Current type	Ph / V / Hz	3 / 400 / 50
Flow rate	l/h	500-2500
Working pressure	bar / MPa	30-150 / 3-15
Max. pressure	bar / MPa	190 / 19
Max. inlet temperature	°C	60
Connection load	kW	12.5
Weight	kg	120
Dimensions (L × W × H)	mm	957 × 686 × 1080

Equipment

Spray gun	EASY!Force Advanced	
High-pressure hose	m	15 / Premium quality
Spray lance	mm	1050
Power nozzle	■	
Dirt blaster	■	
ANTI!Twist	-	
Pressure cut-off	■	
Infinitely variable pressure and water flow regulation	■	
High-pressure spray lance	■	
Servo Control	■	

■ Included in the scope of supply.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0



	Order no.	ID	Max. working pressure	Length		Price	Description	
Standard with unions on both sides								
High-pressure hose, 2 x EASY!Lock, DN 12, 210 bar, 15 m	1	6.110-059.0	ID 12	210 bar	15 m		Suitable for up to 250 bar working pressure: high-pressure hose (ID 12), 15 m long, with convenient EASY!Lock hand screw connection at both ends.	▲
High-pressure hose, 2 x EASY!Lock, 2x EASY!Lock, DN 12, 210 bar, 40 m	2	6.110-060.0	ID 12	210 bar	40 m		With EASY!Lock hand screw connection, 40 m long for wide working radius: high-pressure hose (ID 12) with EASY!Lock hand screw connection at both ends. Suitable for up to 250 bar working pressure.	▲
Longlife 400 with unions on both sides								
Longlife 400 high-pressure hose, 2 x EASY!Lock, DN 8, 400 bar, 1.5 m	3	6.110-024.0	ID 8	400 bar	1.5 m		1.5 m short high-pressure hose (ID 8). With convenient EASY!Lock hand screw connection at both ends for robust and fast connections. Durable, for up to 400 bar pressure.	□
Longlife 400 high-pressure hose, 1 x EASY!Lock, 1 x M22 x 1.5, DN 8, 400 bar, 1.5 m	4	6.110-069.0	ID 8	400 bar	1.5 m		High-pressure hose (ID 8) with double steel reinforcement, 30 m long, suitable for up to 400 bar pressure. Connectors: M 22 x 1.5, quick and convenient EASY!Lock hand screw connection.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS 1.353-907.0



		Order no.	Flow rate				Price	Description	
Trigger guns									
EASY!Force Advanced	1	4.118-005.0						Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
Servo control									
Servo Control controller with EASY!Lock	2	4.118-009.0	1100 l/h					Water quantity and pressure regulated directly from the hand spray gun.	■
Quick connect									
Quick coupling	3	2.115-000.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Male coupling	4	2.115-001.0						Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 x 1.5 external thread.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0



1-2

		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle 25° - 155	1	2.113-030.0	155					Flat jet nozzle for large area performance and stubborn dirt.	■
Power nozzle spray angle 15°									
Power nozzle 15° - 055	2	2.113-047.0	55					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0




		Order no.	Max. working pressure	Nozzle size			Price	Description
Dirt blaster, large								
Dirt blaster, large 170	1	4.114-046.0	300 bar	170				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0

KÄRCHER

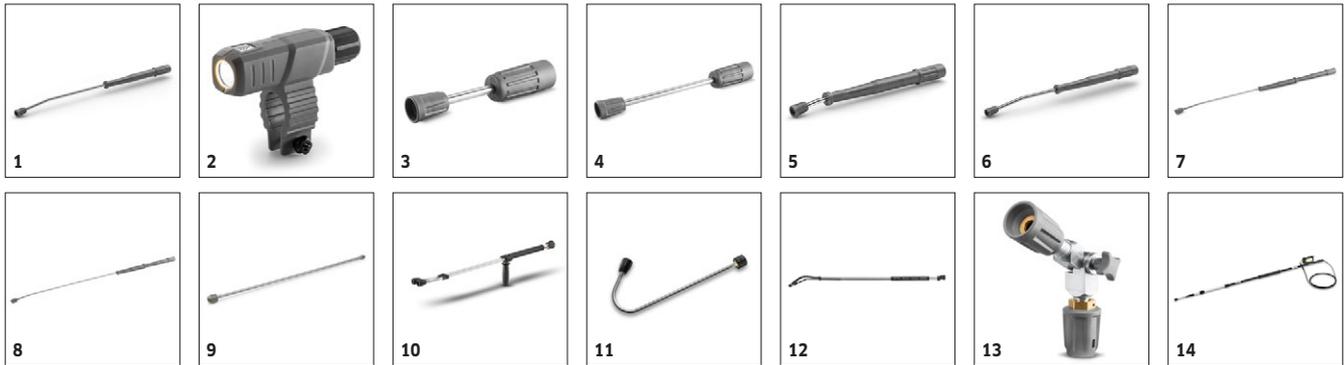

		Order no.	Max. working pressure	Length		Price	Description	
Rotating spray lances								
1050 mm spray pipe, rotatable	1	4.112-000.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	2	2.680-002.0		125 mm				□
Spray lance, 250 mm, rotating	3	4.112-027.0	300 bar	250 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 400 mm, rotatable	4	4.112-024.0	300 bar	400 mm				□
600 mm spray pipe, rotatable	5	4.112-007.0	300 bar	600 mm				□
Spray lance, 840 mm, rotating	6	4.112-006.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
1550 mm spray pipe, rotatable	7	4.112-018.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
2050 mm spray pipe, rotatable	8	4.112-021.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
EASY!Lock 1000 mm spray lance extender	9	4.112-048.0	300 bar	1000 mm			Spray lance extension with EASY!Lock connection. Length 1000 mm.	□
Double lance								
Double lance 960 mm	10	2.112-016.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
Angular spray lance								
Spray lance for toilets and rain gutters	11	4.112-029.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance								
Flexible lance 1050 mm	12	4.112-035.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
TR 20 articulated joint	13	4.112-057.0	300 bar				For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	□
Telescopic spray lance								
Telescopic spray lance	14	4.112-037.0	225 bar	5400 mm			Can be continuously extended from 1.8 to 5.4 m. For cleaning areas that are difficult to reach, such as ceilings or facades. With integrated HD trigger gun, M 22 x 1.5 connection with rotary coupling. Connection for M 18 x 1.5 nozzles.	□
Strap for telescopic spray pipe	15	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□
Gutter cleaner								
Gutter cleaning lance	16	2.112-015.0		960 mm			The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□
Undercarriage spray lance								
Underbody lance	17	4.112-032.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0



		Order no.	Max. working pressure	Length		Price	Description
Additional handle							
Additional handle for EASY!Lock spray lances	18	4.321-380.0					Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0



		Order no.					Price	Description	
Y distributor									
Y distributor	1	4.111-024.0						Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	<input type="checkbox"/>
Water filter set									
Water filter attachment kit for HD 25/15-4 Cage Plus	2	2.851-065.0						For HD 25/15-4 Cage Plus.	<input type="checkbox"/>
Elapsed time counter set									
Add-on hour counter	3	2.851-066.0						The operating hour counter meters the operating time for contractors and machine hire companies. It also makes it easier to check when the unit needs servicing.	<input type="checkbox"/>
Set of puncture-proof wheels									
Set of puncture-proof wheels	4	2.851-067.0						The foam-filled wheels combine the ride comfort of pneumatic wheels and the puncture protection of solid rubber wheels.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0

KÄRCHER



		Order no.					Price	Description	
Nozzle union									
Nozzle screws	1	4.112-011.0						Nozzle screws with protectors for high-pressure and power nozzles	<input type="checkbox"/>
Rotary coupling									
Rotary coupling	2	4.111-021.0						Reliably prevents twisting of HP hoses. Connection M 22 x 1.5 m. Handle protection	<input type="checkbox"/>
Coupling									
Adapter hose extension 9 TR	3	4.111-037.0						Adapter 9 to connect the new hose with the new hose	<input type="checkbox"/>
Connector									
Screw socket for surface cleaners and Servo Control controllers	4	4.111-022.0						For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 x M 22 x 1.5/1 x M 18 x 1.5.	<input type="checkbox"/>
Short spray unit	5	4.111-038.0						For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	<input type="checkbox"/>
EASY!Lock adapter									
Adapter 1 M22AG-TR22AG	6	4.111-029.0						Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	7	4.111-030.0						Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	8	4.111-031.0						Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 4 TR22IG-D11	9	4.111-032.0						Adapter 4 to connect the new gun with the old swivel hose	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	10	4.111-033.0						Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	11	4.111-034.0						Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	12	4.111-035.0						Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	13	4.111-036.0						Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	14	4.111-046.0						Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	<input type="checkbox"/>
Cleaning agent injector									
Cleaning agent dosing attachment kit for HD 25/15-4 and HD 20/15-4 Cage Plus	15	4.637-031.0						Adds up to 5% detergent in high and low pressure modes. Consists of detergent injector + nozzle insert + low pressure nozzle + rollover nozzle holder (for comfortable switch between high and low pressure).	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS 1.353-907.0



		Order no.	Flow rate				Price	Description	
Cup foam lance									
Cup foam lance Basic 3	1	4.112-055.0	900-2500 l/h					High-quality, simple and durable: Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h. Halves the cleaning agent consumption while maintaining optimum foam quality.	<input type="checkbox"/>
Cup foam lance Advanced 025	2	2.112-017.0						Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for advanced foam lance	3	6.414-050.0						Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>
1-litre cleaning agent container for foam lance	4	6.414-954.0						Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 6.394-668)	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle attachment kit	5	2.112-013.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS 1.353-907.0

KÄRCHER



		Order no.	Length				Price	Description	
Manual hose reel attachment kit									
Stainless steel hose reel attachment kit for HD Cage super class	1	2.110-001.0	40 m					Hose reel attachment kit for installation on the machine. For secure and space-saving storage of the high-pressure hose (with a connection hose for the machine high-pressure output).	<input type="checkbox"/>
Automatic, self-winding hose reels for wall mounting									
Automatic hose reel, powder-coated steel / plastic	2	6.392-074.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum	3	6.392-083.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic hose reel, coated	4	6.392-106.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, basalt grey-coated	5	6.392-105.0	20 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	<input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder	6	6.392-076.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Automatic stainless steel hose reel	7	6.392-122.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
	8	6.392-442.0	40 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
Powder-coated swivel holder	9	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	10	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS 1.353-907.0



		Order no.	Length	Diameter		Price	Description	
Other HP Accessories								
Coin remote control	1	2.644-029.0					Coin remote control with electronic coin acceptor for connecting a high-pressure cleaner as a pre-wash device. Please have the power outlet and cable provided on site.	<input type="checkbox"/>
Geka coupling								
Geka connector with hose barb, R 1"	2	6.388-465.0					with hose barb	<input type="checkbox"/>
Geka connector with internal thread, R 1"	3	6.388-458.0					with female thread	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 25/15-4 CAGE PLUS

1.353-907.0



		Order no.	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush	1	4.113-001.0						For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 x 1.5	<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for > 800 l/h machines, nylon bristles	2	4.113-002.0	800-1300 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for > 800 l/h machines, natural bristles	3	4.113-005.0	800-1300 l/h						<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.