

# Impact Wrenches





## Low weight – **High output**

- Models with twin hammer impact mechanism for fast run down
- Models with composite housing for best power-to-weight ratio and with durable aluminum and magnesium housing
- Button controlled forward/reverse settings
- Easy one hand operation for pistol grip models
- Ergonomic handles with rubber grip

# Impact Wrenches



W2915

## W29-series

With easy operation the W29-series are your perfect partner for general assembly and tackling the toughest industrial jobs that requires high torque output.

These models features a twin hammer impact mechanism for fast run down with a composite housing for best power-to-weight ratio with four torque settings.

Easy one hand operation (Left or right handed) with button controlled torque setting (forward/reverse) with a ergonomic handle with anti-slip rubber grip.



W2910



W2911



W2920

Model	Bolt size mm	Square drive size in	Torque - Forward Nm	Torque - Reverse Nm	Torque Range Nm	Free speed r/min	Weight kg	Air consumption l/s	Rec. hose size mm	Air inlet thread BSP	Model type	Impact mechanism	Ordering No.
W2910	M14	3/8"	310	500	150-400	6500	1.2	17	10	1/4"	Pistol	Twin hammer	8434124850
W2911	M14	1/2"	370	500	150-400	7300	1.2	17	10	1/4"	Pistol	Twin hammer	8434124851
W2915	M16	1/2"	710	1000	200-800	7700	2.0	18	10	1/4"	Pistol	Twin hammer	8434124852
W2920	M30	3/4"	1400	1500	300-1450	5500	3.2	27	13	3/8"	Pistol	Twin hammer	8434124853

Torque range (min/max) is a calculated value acc. To Skidmore. Performance is depending on air installation and type of bolted joint.



# Impact Wrenches

## W24-series

These tools features a steel, aluminum and magnesium housing and can handle tough environments providing fast rundown and tightening.

They have powerful impact mechanisms for fast run down with four torque settings.

The W24-series features compact pistol to larger straight models for many different applications.



W2415



W2410



W2411



W2412



W2427



W2420



W2425




W2428

Model	Bolt size mm	Square drive size in	Torque - Forward Nm	Torque - Reverse Nm	Torque Range Nm	Free speed r/min	Weight kg	Air consumption l/s	Rec. hose size mm	Air inlet thread BSP	Model type	Impact mechanism	Ordering No.
W2410	M10	1/4" HEX	98	110	13 - 80	7000	1	11	10	1/4"	Pistol	Twin hammer	8434124854
W2411	M10	3/8"	130	140	13 - 110	7000	1	11	10	1/4"	Pistol	Twin hammer	8434124855
W2412	M16	1/2"	250	350	100 - 300	7400	1.4	13	10	1/4"	Pistol	Twin hammer	8434124862
W2415	M16	1/2"	550	750	150 - 650	7700	2.7	20	10	1/4"	Pistol	Pin clutch	8434124856
W2420	M30	3/4"	1450	1700	650 - 1300	5600	5.4	26	13	3/8"	Pistol	Twin hammer	8434124857
W2425	M33	1"	2200	2550	700 - 1400	4500	10.2	44	19	1/2"	Pistol	Pinless	8434124858
W2427	M33	1"	1800	2200	700 - 1500	4500	6.7	36	19	1/2"	Straight	Twin hammer	8434124859
W2428	M33	1"	2200	2800	800 - 1600	5000	10.5	48	19	1/2"	Straight	Pinless	8434124860
W2415 KIT: Incl. 5 sockets. Sizes: 13, 15, 17, 19 & 24 mm.													8434124861

Torque range (min/max) is a calculated value acc. To Skidmore. Performance is depending on air installation and type of bolted joint.

# Ratchet Wrenches

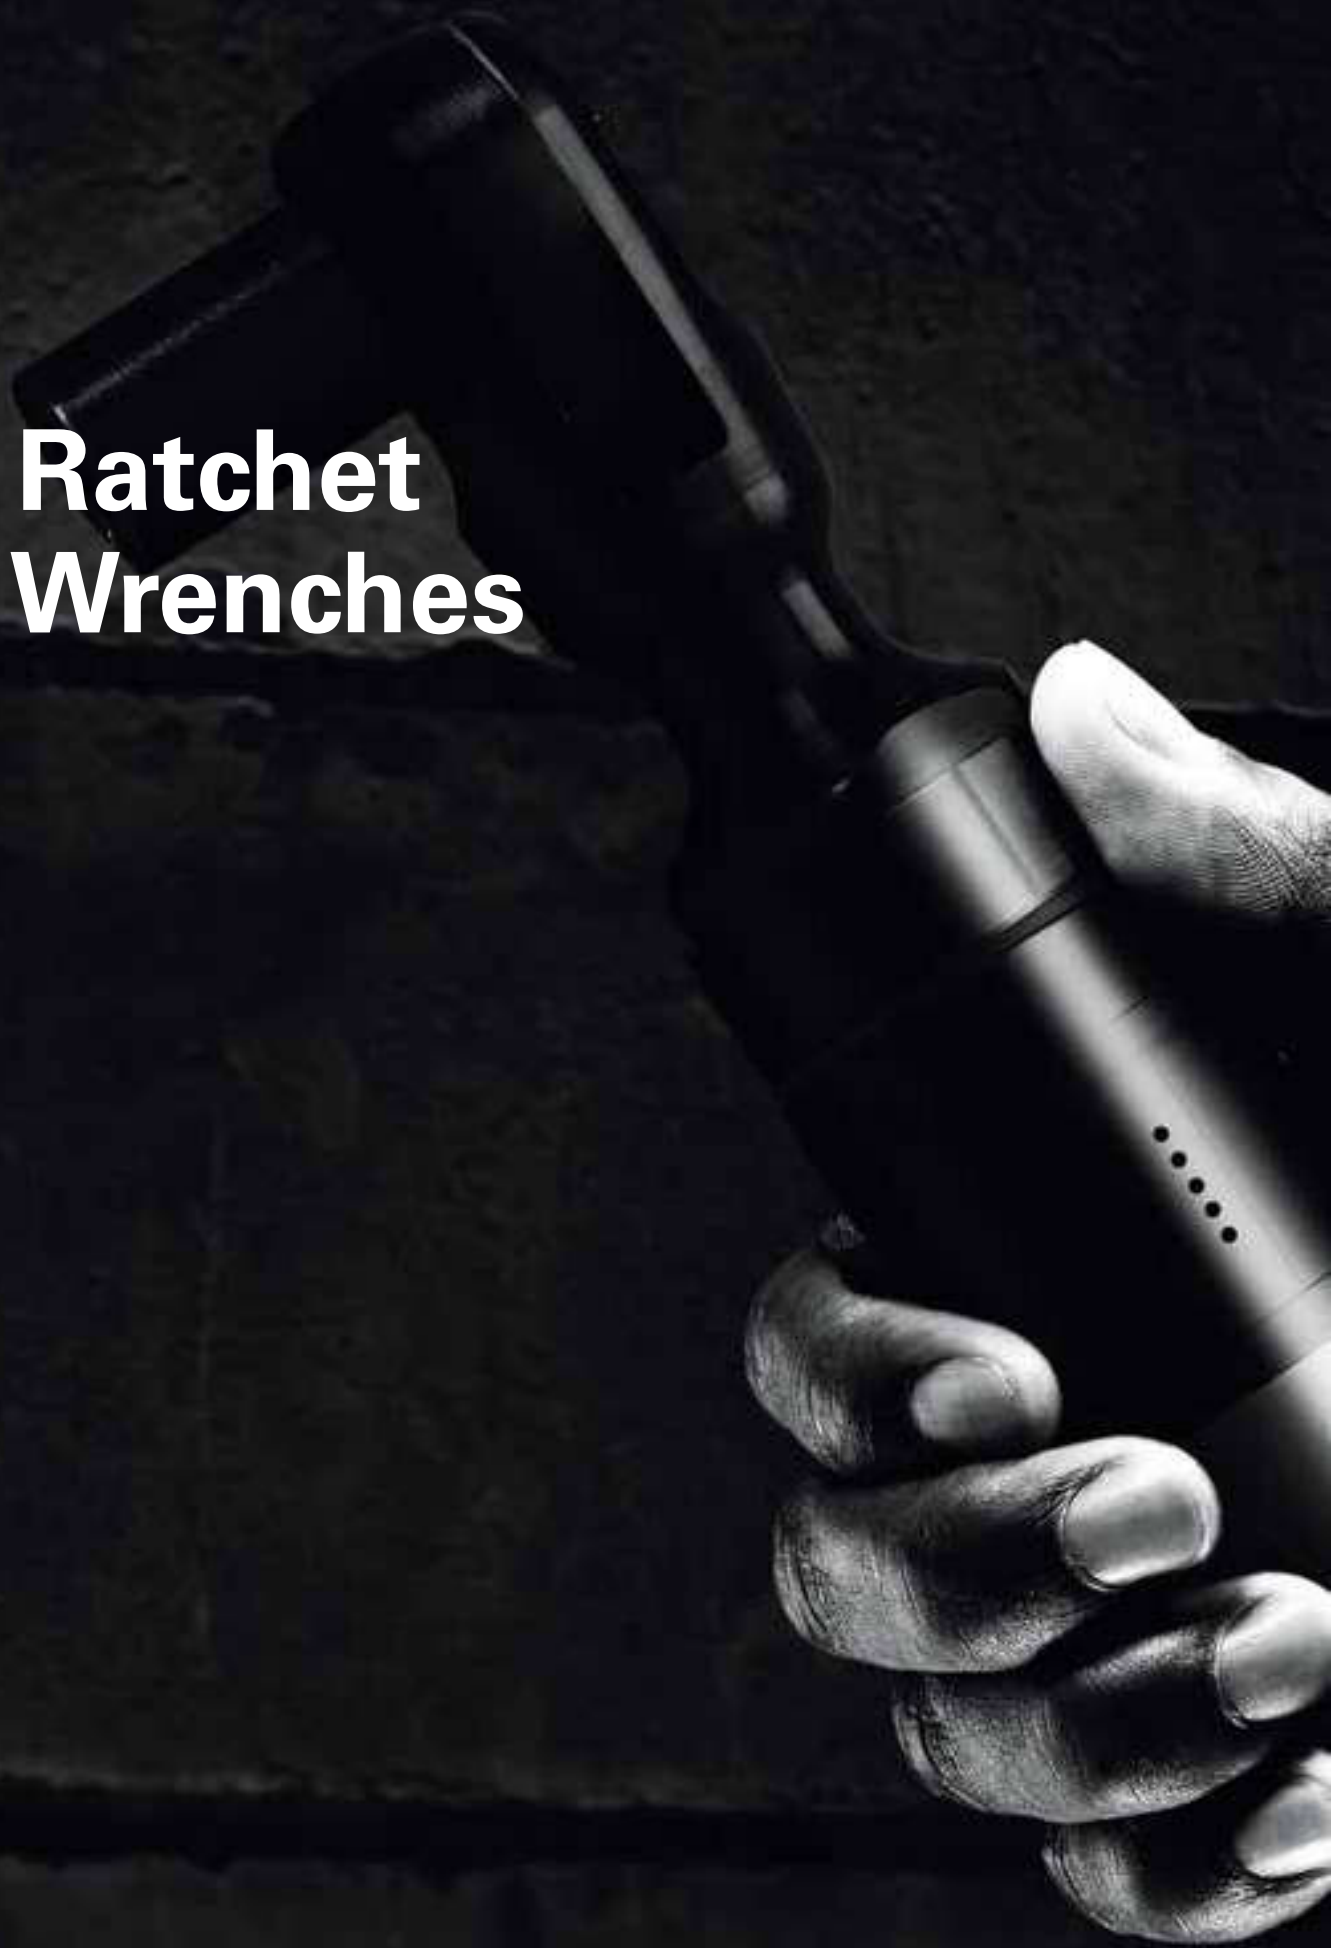



## Compact **and powerful!**

- Great power-to-weight ratio
- Robust composite housing
- Rubber grip on handle for insulation and comfort
- Easy switch between forward and reverse
- 360 degree adjustable air exhaust

# Ratchet Wrenches

## W26-series

---

PRO ratchet wrenches are powerful, reversible and designed for easy access in confined spaces.

The tools are light, comfortable and easy to work with, due to their robust composite housing and high power-to-weight ratios.



W2620 / W2621

# Ratchet Wrenches



W2610 / W2611



W2630 / W2631

Model	Bolt size mm	Square drive size in	Torque range Nm	Free speed r/min	Weight kg	Length mm	Air con- sumption l/s	Rec. hose size mm	Air inlet thread BSP	Ordering No.
W2611	M8	1/4"	4-40	280	0.55	192	9	10	1/4"	8431 0350 11
W2610	M8	3/8"	4-40	280	0.55	192	9	10	1/4"	8431 0350 10
W2621	M12	3/8"	5-68	170	1.1	271	10	10	1/4"	8431 0350 21
W2620	M12	1/2"	5-68	170	1.1	271	10	10	1/4"	8431 0350 20
W2631	M14	3/8"	25-80	200	1.2	307	11	10	1/4"	8431 0350 31
W2630	M14	1/2"	25-80	200	1.2	307	11	10	1/4"	8431 0350 30

Torque range (min/max) is a calculated value acc. To Skidmore. Performance is depending on air installation and type of bolted joint.